
## **Ping Shum**

List of Publications by Year in descending order

Source: https://exaly.com/author-pdf/7846933/publications.pdf Version: 2024-02-01

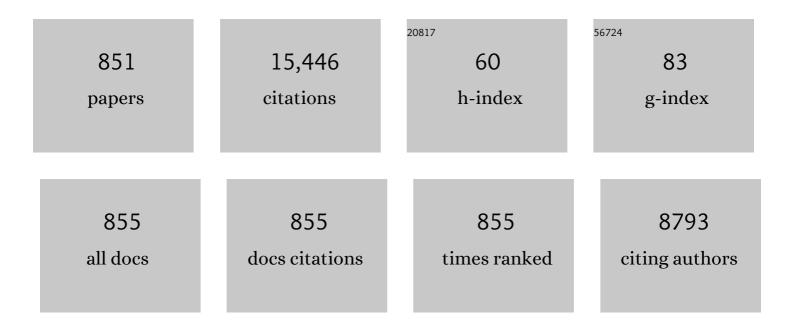

DINC SHUM

| #  | Article  | IF   | CITATIONS |
|----|--|------|-----------|
| 1  | Temperature-insensitive strain sensor with polarization-maintaining photonic crystal fiber based<br>Sagnac interferometer. Applied Physics Letters, 2007, 90, 151113.          | 3.3  | 371       |
| 2  | Flexible and High-Voltage Coaxial-Fiber Aqueous Rechargeable Zinc-Ion Battery. Nano Letters, 2019, 19, 4035-4042.  | 9.1  | 202       |
| 3  | A selectively coated photonic crystal fiber based surface plasmon resonance sensor. Journal of<br>Optics (United Kingdom), 2010, 12, 015005.                                   | 2.2  | 185       |
| 4  | Refractive index sensor using microfiber-based Mach–Zehnder interferometer. Optics Letters, 2012, 37,<br>67.   | 3.3  | 169       |
| 5  | Measurements of refractive index sensitivity using long-period grating refractometer. Optics Communications, 2004, 229, 65-69.   | 2.1  | 161       |
| 6  | Thermally drawn advanced functional fibers: New frontier of flexible electronics. Materials Today,<br>2020, 35, 168-194.   | 14.2 | 153       |
| 7  | Cascaded fiber-optic Fabry-Perot interferometers with Vernier effect for highly sensitive measurement of axial strain and magnetic field. Optics Express, 2014, 22, 19581.     | 3.4  | 149       |
| 8  | Tunable and switchable dual-wavelength Tm-doped mode-locked fiber laser by nonlinear polarization evolution. Optics Express, 2015, 23, 4369.                                   | 3.4  | 145       |
| 9  | Highly sensitive refractive index sensor based on cascaded microfiber knots with Vernier effect.<br>Optics Express, 2015, 23, 6662.  | 3.4  | 138       |
| 10 | Refractive index sensing based on higher-order mode reflection of a microfiber Bragg grating. Optics<br>Express, 2010, 18, 26345.  | 3.4  | 118       |
| 11 | Measurement of a Topological Edge Invariant in a Microwave Network. Physical Review X, 2015, 5, .  | 8.9  | 113       |
| 12 | Long period grating cascaded to photonic crystal fiber modal interferometer for simultaneous measurement of temperature and refractive index. Optics Letters, 2012, 37, 2283.  | 3.3  | 112       |
| 13 | Ultrawideband monocycle generation using cross-phase modulation in a semiconductor optical amplifier. Optics Letters, 2007, 32, 1223.  | 3.3  | 107       |
| 14 | Single-Longitudinal-Mode Erbium-Doped Fiber Ring Laser Based on High Finesse Fiber Bragg Grating<br>Fabry–PA‰rot Etalon. IEEE Photonics Technology Letters, 2008, 20, 976-978. | 2.5  | 107       |
| 15 | Strain-insensitive and high-temperature long-period gratings inscribed in photonic crystal fiber.<br>Optics Letters, 2005, 30, 367.  | 3.3  | 103       |
| 16 | Review of diverse optical fibers used in biomedical research and clinical practice. Journal of<br>Biomedical Optics, 2014, 19, 080902.   | 2.6  | 103       |
| 17 | Ultrathin graphene diaphragm-based extrinsic Fabry-Perot interferometer for ultra-wideband fiber<br>optic acoustic sensing. Optics Express, 2018, 26, 20758.                   | 3.4  | 102       |
| 18 | Nanostructural zinc oxide and its electrical and optical properties. Journal of Applied Physics, 2004, 95, 661-666.  | 2.5  | 93        |

| #  | Article   | IF  | CITATIONS |
|----|---|-----|-----------|
| 19 | Magnetic field sensor using tilted fiber grating interacting with magnetic fluid. Optics Express, 2013, 21, 17863.  | 3.4 | 93        |
| 20 | High-energy laser pulse with a submegahertz repetition rate from a passively mode-locked fiber laser.<br>Optics Letters, 2009, 34, 1432.  | 3.3 | 91        |
| 21 | Stable room-temperature multi-wavelength lasing realization in ordinary erbium-doped fiber loop<br>lasers. Optics Express, 2006, 14, 9293.  | 3.4 | 89        |
| 22 | An optically tunable wideband optoelectronic oscillator based on a bandpass microwave photonic filter. Optics Express, 2013, 21, 16381.   | 3.4 | 89        |
| 23 | Humidity Sensor With a PVA-Coated Photonic Crystal Fiber Interferometer. IEEE Sensors Journal, 2013, 13, 2214-2216.   | 4.7 | 85        |
| 24 | A simplified model and optimal design of a multiwavelength backward-pumped fiber Raman amplifier.<br>IEEE Photonics Technology Letters, 2001, 13, 945-947.                                | 2.5 | 82        |
| 25 | Fabrication and Characterization of a Highly Temperature Sensitive Device Based on Nematic Liquid<br>Crystal-Filled Photonic Crystal Fiber. IEEE Photonics Journal, 2012, 4, 1248-1255.   | 2.0 | 82        |
| 26 | Multiwavelength Raman fiber laser with a continuously-tunable spacing. Optics Express, 2006, 14, 3288.  | 3.4 | 81        |
| 27 | Ultrafast All-Optical Signal Processing Based on Single Semiconductor Optical Amplifier and Optical Filtering. IEEE Journal of Selected Topics in Quantum Electronics, 2008, 14, 770-778. | 2.9 | 81        |
| 28 | Optical fiber magnetic field sensor based on magnetic fluid and microfiber mode interferometer.<br>Optics Communications, 2015, 336, 5-8.   | 2.1 | 80        |
| 29 | Exceptional points in a non-Hermitian topological pump. Physical Review B, 2017, 95, .  | 3.2 | 79        |
| 30 | Low-loss all-solid photonic bandgap fiber. Optics Letters, 2007, 32, 1023.  | 3.3 | 77        |
| 31 | Experimental demonstration of large capacity WSDM optical access network with multicore fibers and advanced modulation formats. Optics Express, 2015, 23, 10997.                          | 3.4 | 77        |
| 32 | Directional torsion and temperature discrimination based on a multicore fiber with a helical structure. Optics Express, 2018, 26, 544.  | 3.4 | 76        |
| 33 | Instantaneous Microwave Frequency Measurement Using Photonic Technique. IEEE Photonics<br>Technology Letters, 2009, 21, 1069-1071.  | 2.5 | 75        |
| 34 | Photonic crystal fiber tip interferometer for refractive index sensing. Optics Letters, 2012, 37, 1373.   | 3.3 | 74        |
| 35 | Single-wall carbon nanotubes and graphene oxide-based saturable absorbers for low phase noise<br>mode-locked fiber lasers. Scientific Reports, 2016, 6, 25266.                            | 3.3 | 74        |
| 36 | Temperature-insensitive tilt sensor with strain-chirped fiber Bragg gratings. IEEE Photonics<br>Technology Letters, 2005, 17, 2394-2396.  | 2.5 | 73        |

Ping Shum

| #  | Article  | IF   | CITATIONS |
|----|--|------|-----------|
| 37 | A novel temperature-insensitive fiber Bragg grating sensor for displacement measurement. Smart<br>Materials and Structures, 2005, 14, N7-N10.  | 3.5  | 73        |
| 38 | Design and fabrication of elliptical-core few-mode fiber for MIMO-less data transmission. Optics Letters, 2016, 41, 3058.  | 3.3  | 73        |
| 39 | Sensitivity Enhancement in Surface Plasmon Resonance Biochemical Sensor Based on Transition Metal<br>Dichalcogenides/Graphene Heterostructure. Sensors, 2018, 18, 2056.                  | 3.8  | 73        |
| 40 | Highly sensitive SERS detection and quantification of sialic acid on single cell using photonic-crystal fiber with gold nanoparticles. Biosensors and Bioelectronics, 2015, 64, 227-233. | 10.1 | 71        |
| 41 | Temperature Sensor by Using Selectively Filled Photonic Crystal Fiber Sagnac Interferometer. IEEE<br>Photonics Journal, 2012, 4, 1801-1808.  | 2.0  | 70        |
| 42 | Fiber Bragg gratings in heterogeneous multicore fiber for directional bending sensing. Journal of<br>Optics (United Kingdom), 2016, 18, 085705.  | 2.2  | 70        |
| 43 | Highly sensitive strain sensor based on helical structure combined with Mach-Zehnder interferometer in multicore fiber. Scientific Reports, 2017, 7, 46633.                              | 3.3  | 69        |
| 44 | Thermally tunable narrow-bandpass filter based on a linearly chirped fiber Bragg grating. Optics<br>Letters, 2004, 29, 29.   | 3.3  | 68        |
| 45 | Intensity-modulated magnetic field sensor based on magnetic fluid and optical fiber gratings. Applied<br>Physics Letters, 2013, 103, 183511.   | 3.3  | 68        |
| 46 | Ultra-High Sensitive Quasi-Distributed Acoustic Sensor Based on Coherent OTDR and Cylindrical<br>Transducer. Journal of Lightwave Technology, 2020, 38, 929-938.                         | 4.6  | 68        |
| 47 | Security-Enhanced OFDM-PON Using Hybrid Chaotic System. IEEE Photonics Technology Letters, 2015, 27, 326-329.  | 2.5  | 66        |
| 48 | High-sensitivity birefringent and single-layer coating photonic crystal fiber biosensor based on surface plasmon resonance. Applied Optics, 2018, 57, 1883.                              | 1.8  | 66        |
| 49 | Highly sensitive gas refractometers based on optical microfiber modal interferometers operating at dispersion turning point. Optics Express, 2018, 26, 29148.                            | 3.4  | 66        |
| 50 | Multi-wavelength linear-cavity tunable fiber laser using a chirped fiber Bragg grating and a few-mode<br>fiber Bragg grating. Optics Express, 2005, 13, 5614.                            | 3.4  | 65        |
| 51 | Photonic-assisted microwave frequency measurement with higher resolution and tunable range.<br>Optics Letters, 2009, 34, 743.  | 3.3  | 65        |
| 52 | Theoretical Study of Dual-Core Photonic Crystal Fibers With Metal Wire. IEEE Photonics Journal, 2012,<br>4, 1178-1187.   | 2.0  | 65        |
| 53 | Secure OFDM-PON System Based on Chaos and Fractional Fourier Transform Techniques. Journal of<br>Lightwave Technology, 2014, 32, 2629-2635.  | 4.6  | 65        |
| 54 | Deep-notch, ultracompact long-period grating in a large-mode-area photonic crystal fiber. Optics<br>Letters, 2003, 28, 2467.   | 3.3  | 64        |

| #  | Article  | IF  | CITATIONS |
|----|--|-----|-----------|
| 55 | Fiber Cavity Ring-Down Refractive Index Sensor. IEEE Photonics Technology Letters, 2008, 20, 1351-1353.  | 2.5 | 64        |
| 56 | Theoretical analysis of modulation response and second-order harmonic distortion in vertical-cavity surface-emitting lasers. IEEE Journal of Quantum Electronics, 1996, 32, 2139-2147.                 | 1.9 | 63        |
| 57 | Novel Miniaturized Fabry–Perot Refractometer Based on a Simplified Hollow-Core Fiber With a<br>Hollow Silica Sphere Tip. IEEE Sensors Journal, 2012, 12, 1239-1245.                                    | 4.7 | 63        |
| 58 | Few-mode fiber based Raman distributed temperature sensing. Optics Express, 2017, 25, 4907.  | 3.4 | 63        |
| 59 | A largely tunable CFBG-based dispersion compensator with fixed center wavelength. Optics Express, 2003, 11, 2970.  | 3.4 | 61        |
| 60 | Photonic measurement of microwave frequency based on phase modulation. Optics Express, 2009, 17, 7217.   | 3.4 | 61        |
| 61 | High-energy wave-breaking-free pulse from allfiber mode-locked laser system. Optics Express, 2009, 17,<br>7222.  | 3.4 | 61        |
| 62 | Ultrasensitive Exhaled Breath Sensors Based on Antiâ€Resonant Hollow Core Fiber with In Situ Grown<br>ZnOâ€Bi <sub>2</sub> O <sub>3</sub> Nanosheets. Advanced Materials Interfaces, 2021, 8, 2001978. | 3.7 | 61        |
| 63 | Simultaneous measurement of relative humidity and temperature with PCF-MZI cascaded by fiber Bragg grating. Optics Communications, 2013, 303, 42-45.   | 2.1 | 59        |
| 64 | Bidirectional passively mode-locked soliton fiber laser with a four-port circulator. Optics Letters, 2011, 36, 2089.   | 3.3 | 58        |
| 65 | Side-channel photonic crystal fiber for surface enhanced Raman scattering sensing. Sensors and Actuators B: Chemical, 2016, 223, 195-201.  | 7.8 | 58        |
| 66 | Hybrid Graphene/Gold Plasmonic Fiberâ€Optic Biosensor. Advanced Materials Technologies, 2017, 2,<br>1600185.   | 5.8 | 58        |
| 67 | Photonic generation of tunable microwave signals by beating a dual-wavelength single longitudinal<br>mode fiber ring laser. Applied Physics B: Lasers and Optics, 2008, 91, 99-103.                    | 2.2 | 57        |
| 68 | Polarization dependent guiding in liquid crystal filled photonic crystal fibers. Optics<br>Communications, 2008, 281, 1598-1606.   | 2.1 | 57        |
| 69 | Twist sensor based on axial strain insensitive distributed Bragg reflector fiber laser. Optics Express, 2012, 20, 2844.  | 3.4 | 57        |
| 70 | Simplified Hollow-Core Fiber-Based Fabry–Perot Interferometer With Modified Vernier Effect for<br>Highly Sensitive High-Temperature Measurement. IEEE Photonics Journal, 2015, 7, 1-10.                | 2.0 | 57        |
| 71 | Reflective liquid level sensor based on modes conversion in thin-core fiber incorporating titled fiber<br>Bragg grating. Optics Express, 2014, 22, 11834.  | 3.4 | 55        |
| 72 | Heterogeneous all-solid multicore fiber based multipath Michelson interferometer for high<br>temperature sensing. Optics Express, 2016, 24, 20210.   | 3.4 | 55        |

| #  | Article   | IF  | CITATIONS |
|----|---|-----|-----------|
| 73 | Output power characteristics of tunable erbium-doped fiber ring lasers. Journal of Lightwave<br>Technology, 2005, 23, 1334-1341.  | 4.6 | 54        |
| 74 | Passive mode locking at harmonics of the free spectral range of the intracavity filter in a fiber ring laser. Optics Letters, 2005, 30, 2852.   | 3.3 | 53        |
| 75 | Design for broadband high-efficiency grating couplers. Optics Letters, 2012, 37, 530.   | 3.3 | 53        |
| 76 | Wavelength-selective all-fiber filter based on a single long-period fiber grating and a misaligned splicing point. Optics Communications, 2006, 258, 159-163.   | 2.1 | 52        |
| 77 | All-solid multi-core fiber-based multipath Mach–Zehnder interferometer for temperature sensing.<br>Applied Physics B: Lasers and Optics, 2013, 112, 491-497.  | 2.2 | 52        |
| 78 | Ultra-sensitive chemical and biological analysis <i>via</i> specialty fibers with built-in microstructured optofluidic channels. Lab on A Chip, 2018, 18, 655-661.  | 6.0 | 52        |
| 79 | Phase sensitive SPR sensor for wide dynamic range detection. Optics Letters, 2011, 36, 4092.  | 3.3 | 51        |
| 80 | Performance-Enhanced Direct Detection Optical OFDM Transmission With CAZAC Equalization. IEEE<br>Photonics Technology Letters, 2015, 27, 1507-1510.   | 2.5 | 51        |
| 81 | Photonic ultrawideband monocycle pulse generation using a single electro-optic modulator. Optics<br>Letters, 2008, 33, 288.   | 3.3 | 50        |
| 82 | In-line optofluidic refractive index sensing in a side-channel photonic crystal fiber. Optics Express, 2016, 24, 27674.   | 3.4 | 50        |
| 83 | Widely tunable Tm-doped mode-locked all-fiber laser. Scientific Reports, 2016, 6, 27245.  | 3.3 | 50        |
| 84 | A 105-nm Ultrawide-Band Gain-Flattened Amplifier Combining <tex>\$C\$</tex> -<br>and <tex>\$L\$</tex> -Band Dual-Core EDFAs in a Parallel Configuration. IEEE Photonics<br>Technology Letters, 2004, 16, 1640-1642. | 2.5 | 49        |
| 85 | Temperature-insensitive fiber Bragg grating accelerometer. IEEE Photonics Technology Letters, 2003, 15, 1437-1439.  | 2.5 | 48        |
| 86 | 40 Gb/s all-optical NRZ to RZ format conversion using single SOA assisted by optical bandpass filter.<br>Optics Express, 2007, 15, 2907.  | 3.4 | 48        |
| 87 | Simple and compact reflective refractometer based on tilted fiber Bragg grating inscribed in thin-core fiber. Optics Letters, 2014, 39, 22.   | 3.3 | 48        |
| 88 | All-fiber multiwavelength thulium-doped laser assisted by four-wave mixing in highly germania-doped<br>fiber. Optics Express, 2015, 23, 340.  | 3.4 | 48        |
| 89 | Ultra-Low-Loss High-Contrast Gratings Based Spoof Surface Plasmonic Waveguide. IEEE Transactions<br>on Microwave Theory and Techniques, 2017, 65, 2008-2018.  | 4.6 | 48        |
| 90 | Microfiber Fabry–Perot interferometer fabricated by taper-drawing technique and its application as a radio frequency interrogated refractive index sensor. Optics Letters, 2012, 37, 2925.                          | 3.3 | 47        |

| #   | Article   | IF   | CITATIONS |
|-----|---|------|-----------|
| 91  | A Selectable Multiband Bandpass Microwave Photonic Filter. IEEE Photonics Journal, 2013, 5, 5500509.  | 2.0  | 47        |
| 92  | An optical fiber network oracle for NP-complete problems. Light: Science and Applications, 2014, 3, e147-e147.  | 16.6 | 47        |
| 93  | Polarization-maintaining few mode fiber composed of a central circular-hole and an elliptical-ring core. Photonics Research, 2017, 5, 261.  | 7.0  | 47        |
| 94  | An effective splicing method on photonic crystal fiber using CO2 laser. IEEE Photonics Technology<br>Letters, 2003, 15, 942-944.  | 2.5  | 46        |
| 95  | All-normal-dispersion passively mode-locked Yb-doped fiber ring laser based on a graphene oxide saturable absorber. Laser Physics Letters, 2013, 10, 075108.                        | 1.4  | 46        |
| 96  | Improved location algorithm for multiple intrusions in distributed Sagnac fiber sensing system.<br>Optics Express, 2014, 22, 7587.  | 3.4  | 46        |
| 97  | Temperature-insensitive accelerometer based on a strain-chirped FBC. Sensors and Actuators A:<br>Physical, 2010, 157, 15-18.  | 4.1  | 45        |
| 98  | Electron-Rich Two-Dimensional Molybdenum Trioxides for Highly Integrated Plasmonic Biosensing.<br>ACS Photonics, 2018, 5, 347-352.  | 6.6  | 45        |
| 99  | Switching dynamics of short optical pulses in a nonlinear directional coupler. IEEE Journal of Quantum Electronics, 1999, 35, 79-83.  | 1.9  | 44        |
| 100 | Temperature insensitive measurements of static displacements using a fiber Bragg grating. Optics Express, 2003, 11, 1918.   | 3.4  | 44        |
| 101 | Passive harmonic mode locking of twin-pulse solitons in an erbium-doped fiber ring laser. Optics<br>Communications, 2004, 229, 363-370.   | 2.1  | 44        |
| 102 | Sensitivity-enhanced fiber optic temperature sensor with strain response suppression. Optical Fiber Technology, 2013, 19, 289-292.  | 2.7  | 44        |
| 103 | Spatial-Division Multiplexed Mach–Zehnder Interferometers in Heterogeneous Multicore Fiber for<br>Multiparameter Measurement. IEEE Photonics Journal, 2016, 8, 1-8.                 | 2.0  | 44        |
| 104 | Linear cavity erbium-doped fiber laser with over 100 nm tuning range. Optics Express, 2003, 11, 1689.   | 3.4  | 43        |
| 105 | A stable dual-wavelength fiber laser with tunable wavelength spacing using a polarization-maintaining linear cavity. Applied Physics B: Lasers and Optics, 2005, 81, 807-811.       | 2.2  | 43        |
| 106 | Real-Time Denoising of Brillouin Optical Time Domain Analyzer With High Data Fidelity Using<br>Convolutional Neural Networks. Journal of Lightwave Technology, 2019, 37, 2648-2653. | 4.6  | 43        |
| 107 | Sensing and lasing applications of whispering gallery mode microresonators. Opto-Electronic Advances, 2018, 1, 18001501-18001510.   | 13.3 | 43        |
| 108 | One-step synthesis of cyclodextrin-capped gold nanoparticles for ultra-sensitive and highly-integrated plasmonic biosensors. Sensors and Actuators B: Chemical, 2019, 286, 429-436. | 7.8  | 42        |

Рілс Ѕним

| #   | Article   | IF   | CITATIONS |
|-----|---|------|-----------|
| 109 | A novel method for analysis of soliton propagation in optical fibers. IEEE Journal of Quantum<br>Electronics, 1995, 31, 190-200.  | 1.9  | 41        |
| 110 | Low-loss air-core polarization maintaining terahertz fiber. Optics Express, 2008, 16, 13593.  | 3.4  | 41        |
| 111 | A Compact and Temperature-Sensitive Directional Coupler Based on Photonic Crystal Fiber Filled With<br>Liquid Crystal 6CHBT. IEEE Photonics Journal, 2012, 4, 2010-2016.  | 2.0  | 41        |
| 112 | Dual spectrometer system with spectral compounding for 1-μm optical coherence tomography in vivo.<br>Optics Letters, 2014, 39, 6727.  | 3.3  | 41        |
| 113 | Real-time dynamics of soliton triplets in fiber lasers. Photonics Research, 2020, 8, 884.   | 7.0  | 41        |
| 114 | Bound soliton pulses in passively mode-locked fiber laser. Optics Communications, 2001, 200, 389-399.   | 2.1  | 40        |
| 115 | Dispersion-flattened polarization-maintaining photonic crystal fiber for nonlinear applications.<br>Optics Communications, 2009, 282, 4072-4076.  | 2.1  | 40        |
| 116 | Instantaneous Microwave Frequency Measurement Using a Photonic Microwave Filter With an Infinite<br>Impulse Response. IEEE Photonics Technology Letters, 2010, 22, 682-684.   | 2.5  | 40        |
| 117 | Sensitivity-controllable refractive index sensor based on reflective Î,-shaped microfiber resonator cooperated with Vernier effect. Scientific Reports, 2017, 7, 9620.  | 3.3  | 40        |
| 118 | Hydrazone organics with third-order nonlinear optical effect for femtosecond pulse generation and control in the L-band. Optics and Laser Technology, 2022, 151, 108016.  | 4.6  | 40        |
| 119 | A Wavelength-Switchable Passively Harmonically Mode-Locked Fiber Laser With Low Pumping<br>Threshold Using Single-Walled Carbon Nanotubes. IEEE Photonics Technology Letters, 2010, 22,<br>754-756.   | 2.5  | 39        |
| 120 | Rational Construction of Selfâ€Standing Sulfurâ€Doped Fe <sub>2</sub> O <sub>3</sub> Anodes with<br>Promoted Energy Storage Capability for Wearable Aqueous Rechargeable NiCoâ€Fe Batteries. Advanced<br>Energy Materials, 2020, 10, 2001064. | 19.5 | 39        |
| 121 | Pulse-train nonuniformity in a fiber soliton ring laser mode-locked by using the nonlinear polarization rotation technique. Physical Review A, 2004, 69, .  | 2.5  | 38        |
| 122 | Nonlinear Polarization Rotation in Semiconductor Optical Amplifiers With Linear Polarization Maintenance. IEEE Photonics Technology Letters, 2007, 19, 1931-1933.   | 2.5  | 38        |
| 123 | Evanescent Field Absorption Sensor Using a Pure-Silica Defected-Core Photonic Crystal Fiber. IEEE<br>Photonics Technology Letters, 2008, 20, 336-338.   | 2.5  | 38        |
| 124 | An efficient approach for investigating surface plasmon resonance in asymmetric optical fibers based on birefringence analysis. Optics Express, 2010, 18, 17950.  | 3.4  | 38        |
| 125 | Electrically tunable dispersion compensator with fixed center wavelength using fiber bragg grating.<br>Journal of Lightwave Technology, 2003, 21, 1568-1575.  | 4.6  | 37        |
| 126 | Ultra-wideband pulse generation with flexible pulse shape and polarity control using a Sagnac-interferometer-based intensity modulator. Optics Express, 2007, 15, 18156.  | 3.4  | 37        |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 127 | Simultaneous wavelength and frequency encoded microstructure based quasi-distributed temperature sensor. Optics Express, 2012, 20, 12076.   | 3.4 | 37        |
| 128 | Efficient spot size converter for higher-order mode fiber-chip coupling. Optics Letters, 2017, 42, 3702.  | 3.3 | 37        |
| 129 | Instantaneous Microwave Frequency Measurement Based on Amplified Fiber-Optic Recirculating Delay<br>Loop and BroadBand Incoherent Light Source. Journal of Lightwave Technology, 2011, 29, 78-84. | 4.6 | 36        |
| 130 | Multiwavelength Brillouin-Erbium Random Fiber Laser Incorporating a Chirped Fiber Bragg Grating.<br>IEEE Journal of Selected Topics in Quantum Electronics, 2014, 20, 294-298.                    | 2.9 | 36        |
| 131 | An Ultra-Sensitive Magnetic Field Sensor Based on Extrinsic Fiber-Optic Fabry–Perot Interferometer<br>and Terfenol-D. Journal of Lightwave Technology, 2015, 33, 3332-3337.                       | 4.6 | 36        |
| 132 | Spatial-division multiplexed hybrid Raman and Brillouin optical time-domain reflectometry based on multi-core fiber. Optics Express, 2016, 24, 25111.   | 3.4 | 36        |
| 133 | Towards large dynamic range and ultrahigh measurement resolution in distributed fiber sensing based on multicore fiber. Optics Express, 2017, 25, 20183.  | 3.4 | 36        |
| 134 | Bandwidth-Efficient WDM Channel Allocation for Four-Wave Mixing-Effect Minimization. IEEE<br>Transactions on Communications, 2004, 52, 2184-2189.   | 7.8 | 35        |
| 135 | Bandwidth analysis of waveguide grating coupler. Optics Express, 2013, 21, 5688.  | 3.4 | 35        |
| 136 | Multicore-Fiber-Enabled WSDM Optical Access Network With Centralized Carrier Delivery and RSOA-Based Adaptive Modulation. IEEE Photonics Journal, 2015, 7, 1-9.                                   | 2.0 | 35        |
| 137 | Single SOA based all-optical adder assisted by optical bandpass filter: Theoretical analysis and performance optimization. Optics Communications, 2007, 270, 238-246.                             | 2.1 | 34        |
| 138 | Temperature-Insensitive 2-D Pendulum Clinometer Using Two Fiber Bragg Gratings. IEEE Photonics<br>Technology Letters, 2010, 22, 863-865.  | 2.5 | 34        |
| 139 | Observation of timing jitter reduction induced by spectral filtering in a fiber laser mode locked with a carbon nanotube-based saturable absorber. Optics Letters, 2010, 35, 2320.                | 3.3 | 34        |
| 140 | A Simple Nanometeric Plasmonic Narrow-Band Filter Structure Based on Metal–Insulator–Metal<br>Waveguide. IEEE Nanotechnology Magazine, 2011, 10, 1371-1376.                                       | 2.0 | 34        |
| 141 | Tunable Multi-Tap Bandpass Microwave Photonic Filter Using a Windowed Fabry-Pérot Filter-Based<br>Multi-Wavelength Tunable Laser. Journal of Lightwave Technology, 2011, 29, 3381-3386.           | 4.6 | 34        |
| 142 | Square array photonic crystal fiber-based surface plasmonÂresonanceÂrefractive index sensor. Modern<br>Physics Letters B, 2017, 31, 1750352.  | 1.9 | 34        |
| 143 | Magnetic Field Sensor Based on Magnetic Fluid-Infiltrated Phase-Shifted Fiber Bragg Grating. IEEE<br>Sensors Journal, 2018, 18, 4008-4012.  | 4.7 | 34        |
| 144 | Compact double-part grating coupler for higher-order mode coupling. Optics Letters, 2018, 43, 3172.   | 3.3 | 34        |

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 145 | A performance analysis of an all-optical clock extraction circuit based on Fabry-Perot filter. Journal of Lightwave Technology, 2001, 19, 603-613.                                 | 4.6 | 33        |
| 146 | Design of air-guiding honeycomb photonic bandgap fiber. Optics Letters, 2005, 30, 465.   | 3.3 | 33        |
| 147 | Vector solitons in a laser passively mode-locked by single-wall carbon nanotubes. Optics<br>Communications, 2011, 284, 2007-2011.  | 2.1 | 33        |
| 148 | An Electrooptic Chaotic System Based on a Hybrid Feedback Loop. Journal of Lightwave Technology,<br>2018, 36, 4259-4266.   | 4.6 | 33        |
| 149 | Enhancing the Physical Layer Security of OFDM-PONs With Hardware Fingerprint Authentication: A<br>Machine Learning Approach. Journal of Lightwave Technology, 2020, 38, 3238-3245. | 4.6 | 33        |
| 150 | Experimental observation of shaking soliton molecules in a dispersion-managed fiber laser. Optics<br>Letters, 2020, 45, 1551.  | 3.3 | 33        |
| 151 | Semiconductor-laser-based hybrid chaos source and its application in secure key distribution. Optics Letters, 2019, 44, 2605.  | 3.3 | 33        |
| 152 | Magnetic Field Sensor With Optical Fiber Bitaper-Based Interferometer Coated by Magnetic Fluid. IEEE<br>Sensors Journal, 2014, 14, 3148-3151.                                      | 4.7 | 32        |
| 153 | Random Laser With Multiphase-Shifted Bragg Grating in Er/Yb-Codoped Fiber. Journal of Lightwave<br>Technology, 2015, 33, 95-99.  | 4.6 | 32        |
| 154 | Experimental investigation of inter-core crosstalk tolerance of MIMO-OFDM/OQAM radio over multicore fiber system. Optics Express, 2016, 24, 13418.                                 | 3.4 | 32        |
| 155 | Bound twin-pulse solitons in a fiber ring laser. Physical Review E, 2004, 70, 067602.  | 2.1 | 31        |
| 156 | Regimes of operation states in passively mode-locked fiber soliton ring laser. Optics and Laser Technology, 2004, 36, 299-307.   | 4.6 | 31        |
| 157 | Dual-Loop Optical Buffer (DLOB) Based on a 3 <tex>\$times\$</tex> 3 Collinear Fiber Coupler.<br>IEEE Photonics Technology Letters, 2004, 16, 2129-2131.                            | 2.5 | 31        |
| 158 | Phase-shifted bandpass filter fabrication through CO2 laser irradiation. Optics Express, 2005, 13, 5878.   | 3.4 | 31        |
| 159 | Dynamic switching of optical vortices with dynamic gamma-correction liquid crystal spiral phase plate. Optics Express, 2005, 13, 10285.  | 3.4 | 31        |
| 160 | Cavity ring-down long period grating pressure sensor. Sensors and Actuators A: Physical, 2010, 158, 207-211.   | 4.1 | 31        |
| 161 | Plasmonic optical trap having very large active volume realized with nano-ring structure. Optics<br>Letters, 2012, 37, 1748.   | 3.3 | 31        |
| 162 | A sensitivity enhanced temperature sensor based on highly Germania-doped few-mode fiber. Optics<br>Communications, 2014, 324, 53-57.   | 2.1 | 31        |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 163 | Design and analysis of surface plasmon resonance sensor based on high-birefringent microstructured optical fiber. Journal of Optics (United Kingdom), 2016, 18, 065005.                               | 2.2 | 31        |
| 164 | Ultra-high capacity WDM-SDM optical access network with self-homodyne detection downstream and 32QAM-FBMC upstream. Optics Express, 2017, 25, 5951.   | 3.4 | 31        |
| 165 | Application of an artificial neural network for simultaneous measurement of bending curvature and temperature with long period fiber gratings. Sensors and Actuators A: Physical, 2007, 137, 262-267. | 4.1 | 30        |
| 166 | Holey fiber design for single-polarization single-mode guidance. Applied Optics, 2009, 48, 4038.  | 2.1 | 30        |
| 167 | Microfiber Fabry–Perot Interferometer for Dual-Parameter Sensing. Journal of Lightwave Technology,<br>2013, 31, 1608-1615.  | 4.6 | 30        |
| 168 | Supermode Bragg grating combined Mach-Zehnder interferometer for temperature-strain discrimination. Optics Express, 2015, 23, 33001.  | 3.4 | 30        |
| 169 | Wavelength division multiplexing secure communication scheme based on an optically coupled phase chaos system and PM-to-IM conversion mechanism. Nonlinear Dynamics, 2018, 94, 1949-1959.             | 5.2 | 30        |
| 170 | All-Metal Phosphide Electrodes for High-Performance Quasi-Solid-State Fiber-Shaped Aqueous<br>Rechargeable Ni–Fe Batteries. ACS Applied Materials & Interfaces, 2020, 12, 12801-12808.                | 8.0 | 30        |
| 171 | Strong resonance and a highly compact longperiod grating in a large-mode-area photonic crystal fiber. Optics Express, 2003, 11, 1900.   | 3.4 | 29        |
| 172 | Bandwidth-tunable filter and spacing-tunable comb filter with chirped-fiber Bragg gratings. Optics<br>Communications, 2006, 259, 645-648.   | 2.1 | 29        |
| 173 | Temperatureâ€independent vibration sensor with a fiber Bragg grating. Microwave and Optical<br>Technology Letters, 2010, 52, 2282-2285.   | 1.4 | 29        |
| 174 | Investigation of temperature sensing characteristics in selectively infiltrated photonic crystal fiber.<br>Optics Express, 2016, 24, 1699.  | 3.4 | 29        |
| 175 | Fractional Fourier Transformation-Based Blind Chromatic Dispersion Estimation for Coherent<br>Optical Communications. Journal of Lightwave Technology, 2016, 34, 2371-2380.                           | 4.6 | 29        |
| 176 | Spatial-division multiplexed Brillouin distributed sensing based on a heterogeneous multicore fiber.<br>Optics Letters, 2017, 42, 171.  | 3.3 | 29        |
| 177 | Experimental demonstration of both inverted and non-inverted wavelength conversion based on transient cross phase modulation of SOA. Optics Express, 2006, 14, 7587.                                  | 3.4 | 28        |
| 178 | Tunable microwave photonic notch filter using a dual-wavelength fiber laser with phase modulation.<br>Optics Communications, 2006, 266, 240-248.  | 2.1 | 28        |
| 179 | Stress distribution and induced birefringence analysis for pressure vector sensing based on single mode fibers. Optics Express, 2008, 16, 3955.   | 3.4 | 28        |
| 180 | Polarization Maintaining Air-Core Bandgap Fibers for Terahertz Wave Guiding. IEEE Journal of<br>Quantum Electronics, 2009, 45, 506-513.   | 1.9 | 28        |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 181 | Highly sensitive photonic crystal fiber based absorption spectroscopy. Sensors and Actuators B:<br>Chemical, 2010, 145, 110-113.                                    | 7.8 | 28        |
| 182 | Dissipative Soliton (12 nJ) From an All-Fiber Passively Mode-Locked Laser With Large Normal Dispersion.<br>IEEE Photonics Journal, 2011, 3, 881-887.                | 2.0 | 28        |
| 183 | In-line Mach-Zehnder interferometer composed of microtaper and long-period grating in all-solid photonic bandgap fiber. Applied Physics Letters, 2012, 101, 141106. | 3.3 | 28        |
| 184 | Harmonic and single pulse operation of a Raman laser using graphene. Laser Physics Letters, 2012, 9, 223-228.   | 1.4 | 28        |
| 185 | Simultaneous measurement of curvature and strain based on fiber Bragg grating in two-dimensional waveguide array fiber. Optics Letters, 2013, 38, 4070.             | 3.3 | 28        |
| 186 | Erbium-doped fiber laser with distributed Rayleigh output mirror. Laser Physics, 2014, 24, 115101.  | 1.2 | 28        |
| 187 | Magnetic Field Sensing With Reflectivity Ratio Measurement of Fiber Bragg Grating. IEEE Sensors<br>Journal, 2015, 15, 1372-1376.                                    | 4.7 | 28        |
| 188 | Few-mode fiber based distributed curvature sensor through quasi-single-mode Brillouin frequency shift. Optics Letters, 2016, 41, 1514.                              | 3.3 | 28        |
| 189 | Multi-wavelength erbium-doped fiber laser based on random distributed feedback. Applied Physics B:<br>Lasers and Optics, 2016, 122, 1.                              | 2.2 | 28        |
| 190 | Performance of optical chaotic communication systems using multimode vertical cavity surface emitting lasers. Optics Communications, 2001, 200, 143-152.            | 2.1 | 27        |
| 191 | Design and implementation of user interface for mobile devices. IEEE Transactions on Consumer Electronics, 2004, 50, 1156-1161.                                     | 3.6 | 27        |
| 192 | Photonic crystal fibers with high index infiltrations for refractive index sensing. Optics Communications, 2008, 281, 4555-4559.                                    | 2.1 | 27        |
| 193 | A Nanoplasmonic High-Pass Wavelength Filter Based on a Metal-Insulator-Metal Circuitous<br>Waveguide. IEEE Nanotechnology Magazine, 2011, 10, 1357-1361.            | 2.0 | 27        |
| 194 | Computing matrix inversion with optical networks. Optics Express, 2014, 22, 295.  | 3.4 | 27        |
| 195 | Tunable Erbium-Doped Fiber Laser Based on Random Distributed Feedback. IEEE Photonics Journal, 2014,<br>6, 1-5.   | 2.0 | 27        |
| 196 | Nyquist WDM superchannel using offset-16QAM and receiver-side digital spectral shaping. Optics Express, 2014, 22, 17448.  | 3.4 | 27        |
| 197 | Azimuthally Polarized Radial Emission from a Quantum Dot Fiber Laser. ACS Photonics, 2016, 3, 2275-2279.  | 6.6 | 27        |
|     |   |     |           |

198 Voice activated smart home design and implementation. , 2017, , .

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 199 | Multiplexed ultrafast fiber laser emitting multi-state solitons. Optics Express, 2018, 26, 27461.  | 3.4 | 27        |
| 200 | In-Fiber Mach–Zehnder Interferometer Sensor Based on Er Doped Fiber Peanut Structure in Fiber Ring<br>Laser. Journal of Lightwave Technology, 2021, 39, 3350-3357.                                       | 4.6 | 27        |
| 201 | Stationary and pulsating vector dissipative solitons in nonlinear multimode interference based fiber<br>lasers. Optics Express, 2020, 28, 4216.  | 3.4 | 27        |
| 202 | Effects of active fiber length on the tunability of erbium-doped fiber ring lasers. Optics Express, 2003, 11, 3622.  | 3.4 | 26        |
| 203 | Symmetry properties of two-dimensional anisotropic photonic crystals. Journal of the Optical Society of America A: Optics and Image Science, and Vision, 2006, 23, 2002.                                 | 1.5 | 26        |
| 204 | Photonic Monocycle Pulse Frequency Up-Conversion for Ultrawideband-Over-Fiber Applications. IEEE<br>Photonics Technology Letters, 2008, 20, 1006-1008.   | 2.5 | 26        |
| 205 | Simultaneous Multichannel Photonic Up-Conversion Based on Nonlinear Polarization Rotation of an SOA for Radio-Over-Fiber Systems. IEEE Photonics Technology Letters, 2009, 21, 563-565.                  | 2.5 | 26        |
| 206 | Tunable Microwave Generation Using a Phase-Shifted Chirped Fiber Bragg Grating. IEEE Photonics<br>Technology Letters, 2011, 23, 1292-1294.   | 2.5 | 26        |
| 207 | Temperature- and strain-insensitive curvature sensor based on ring-core modes in dual-concentric-core fiber. Optics Letters, 2016, 41, 380.  | 3.3 | 26        |
| 208 | BOTDA using channel estimation with direct-detection optical OFDM technique. Optics Express, 2017, 25, 12698.  | 3.4 | 26        |
| 209 | Few-mode optical fiber based simultaneously distributed curvature and temperature sensing. Optics Express, 2017, 25, 12722.  | 3.4 | 26        |
| 210 | Recent Advancement of Anti-Resonant Hollow-Core Fibers for Sensing Applications. Photonics, 2021, 8, 128.  | 2.0 | 26        |
| 211 | Compact polarization beam splitter assisted by subwavelength grating in triple-waveguide directional coupler. Applied Optics, 2019, 58, 2264.  | 1.8 | 26        |
| 212 | Analysis of linearly tapered fiber Bragg grating for dispersion slope compensation. IEEE Photonics<br>Technology Letters, 2003, 15, 1389-1391.   | 2.5 | 25        |
| 213 | Generalized coupled nonlinear equations for the analysis of asymmetric two-core fiber coupler.<br>Optics Express, 2003, 11, 116.   | 3.4 | 25        |
| 214 | Air guiding with honeycomb photonic bandgap fiber. IEEE Photonics Technology Letters, 2005, 17, 64-66.   | 2.5 | 25        |
| 215 | Stable triple-wavelength fiber ring laser with ultranarrow wavelength spacing using a<br>triple-transmission-band fiber Bragg grating filter. IEEE Photonics Technology Letters, 2006, 18,<br>2162-2164. | 2.5 | 25        |
| 216 | All-Fiber Q-Switched Erbium-Doped Fiber Ring Laser Using Phase-Shifted Fiber Bragg Grating. Journal of<br>Lightwave Technology, 2008, 26, 945-951.   | 4.6 | 25        |

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 217 | Photonic Time-Stretched Analog-to-Digital Converter Amenable to Continuous-Time Operation Based on Polarization Modulation With Balanced Detection Scheme. Journal of Lightwave Technology, 2011, 29, 3099-3106. | 4.6 | 25        |
| 218 | Wavelength-Tunable High-Energy All-Normal-Dispersion Yb-Doped Mode-Locked All-Fiber Laser With a<br>HiBi Fiber Sagnac Loop Filter. IEEE Journal of Quantum Electronics, 2011, 47, 198-203.                       | 1.9 | 25        |
| 219 | Noninvasive respiration movement sensor based on distributed Bragg reflector fiber laser with beat frequency interrogation. Journal of Biomedical Optics, 2014, 19, 017003.                                      | 2.6 | 25        |
| 220 | Towards low timing phase noise operation in fiber lasers mode locked by graphene oxide and carbon<br>nanotubes at 15 µm. Optics Express, 2015, 23, 501.  | 3.4 | 25        |
| 221 | Dispersion-Tolerant DDO-OFDM System and Simplified Adaptive Modulation Scheme Using CAZAC Precoding. Journal of Lightwave Technology, 2016, 34, 2743-2751.   | 4.6 | 25        |
| 222 | Coexistence of soliton singlets and molecules in a dual-wavelength mode-locked fiber laser. Optics<br>Communications, 2020, 457, 124700.   | 2.1 | 25        |
| 223 | Highly efficient free-space fiber coupler with 45° tilted fiber grating to access remotely placed optical fiber sensors. Optics Express, 2020, 28, 16569.  | 3.4 | 25        |
| 224 | Design and fabrication of flat-band long-period grating. IEEE Photonics Technology Letters, 2003, 15, 1558-1560.   | 2.5 | 24        |
| 225 | Generalized Mueller matrix method for polarization mode dispersion measurement in a system with polarization-dependent loss or gain. Optics Express, 2006, 14, 5067.   | 3.4 | 24        |
| 226 | Tunable fly's-eye lens made of patterned polymer-dispersed liquid crystal. Optics Express, 2006, 14, 5634.   | 3.4 | 24        |
| 227 | Cavity ring-down long-period fibre grating strain sensor. Measurement Science and Technology, 2007, 18, 3135-3138.   | 2.6 | 24        |
| 228 | Simultaneous multi-channel CMW-band and MMW-band UWB monocycle pulse generation using FWM effect in a highly nonlinear photonic crystal fiber. Optics Express, 2010, 18, 15870.                                  | 3.4 | 24        |
| 229 | The EOQ with defective items and partially permissible delay in payments linked to order quantity derived algebraically. Central European Journal of Operations Research, 2012, 20, 141-160.                     | 1.8 | 24        |
| 230 | Cascaded Random Fiber Laser Based on Hybrid Brillouin-Erbium Fiber Gains. IEEE Photonics Technology<br>Letters, 2014, 26, 1287-1290.   | 2.5 | 24        |
| 231 | Switchable thulium-doped fiber laser from polarization rotation vector to scalar soliton. Scientific Reports, 2016, 6, 34844.  | 3.3 | 24        |
| 232 | Simultaneous achievement of highly birefringent and nonlinear photonic crystal fibers with an elliptical tellurite core. Applied Optics, 2018, 57, 6383.   | 1.8 | 24        |
| 233 | Design of double-pass discrete Raman amplifier and the impairments induced by Rayleigh backscattering. Optics Express, 2003, 11, 1887.   | 3.4 | 23        |
| 234 | Photonic Polarity-Switchable Ultra-Wideband Pulse Generation Using a Tunable Sagnac<br>Interferometer Comb Filter. IEEE Photonics Technology Letters, 2008, 20, 1320-1322.                                       | 2.5 | 23        |

| #   | Article  | IF   | CITATIONS |
|-----|--|------|-----------|
| 235 | Tunable microwave generation based on a dual-wavelength single-longitudinal-mode fiber laser using<br>a phase-shifted grating on a triangular cantilever. Applied Optics, 2011, 50, 1900.                  | 2.1  | 23        |
| 236 | Cascaded Photonic Crystal Fiber Interferometers for Refractive Index Sensing. IEEE Photonics Journal, 2012, 4, 1163-1169.  | 2.0  | 23        |
| 237 | Fano Resonance Enhanced Surface Plasmon Resonance Sensors Operating in Near-Infrared. Photonics, 2018, 5, 23.  | 2.0  | 23        |
| 238 | High apacity Ironâ€Based Anodes for Aqueous Secondary Nickelâ^'Iron Batteries: Recent Progress and<br>Prospects. ChemElectroChem, 2021, 8, 274-290.  | 3.4  | 23        |
| 239 | Theoretical investigation of highly birefringent all-solid photonic bandgap fiber with elliptical cladding rods. IEEE Photonics Technology Letters, 2006, 18, 1243-1245.                                   | 2.5  | 22        |
| 240 | Design of All-Solid Bandgap Fiber With Improved Confinement and Bend Losses. IEEE Photonics<br>Technology Letters, 2006, 18, 2560-2562.  | 2.5  | 22        |
| 241 | All-Optical NRZ-DPSK Clock Recovery Using Chromatic-Dispersion-Induced Clock Tone. IEEE Photonics<br>Technology Letters, 2007, 19, 925-927.  | 2.5  | 22        |
| 242 | Photonic RF Phase Shifter Based on a Vector-Sum Technique Using Stimulated Brillouin Scattering in<br>Dispersion Shifted Fiber. IEEE Transactions on Microwave Theory and Techniques, 2010, 58, 3206-3212. | 4.6  | 22        |
| 243 | Temperature compensated magnetic field sensing using dual S-bend structured optical fiber modal interferometer cascaded with fiber Bragg grating. Optics Express, 2014, 22, 27515.                         | 3.4  | 22        |
| 244 | Power-referenced refractometer with tilted fiber Bragg grating cascaded by chirped grating. Optics Communications, 2014, 312, 106-109.   | 2.1  | 22        |
| 245 | Magnetic field sensor based on magnetic-fluid-coated long-period fiber grating. Journal of Optics<br>(United Kingdom), 2015, 17, 065402.   | 2.2  | 22        |
| 246 | Simultaneous implementation of enhanced resolution and large dynamic range for fiber temperature sensing based on different optical transmission mechanisms. Optics Express, 2018, 26, 18341.              | 3.4  | 22        |
| 247 | Secure Strategy for OFDM-PON Using Digital Chaos Algorithm With Fixed-Point Implementation.<br>Journal of Lightwave Technology, 2018, 36, 4826-4833.   | 4.6  | 22        |
| 248 | Liquid Core Fiber Interferometer for Simultaneous Measurement of Refractive Index and Temperature.<br>IEEE Photonics Technology Letters, 2019, 31, 189-192.  | 2.5  | 22        |
| 249 | Planar nonlinear metasurface optics and their applications. Reports on Progress in Physics, 2020, 83, 126101.  | 20.1 | 22        |
| 250 | Experimental and numerical investigation on hollow core photonic crystal fiber based bending sensor. Optics Express, 2019, 27, 30629.  | 3.4  | 22        |
| 251 | Real-time access to the coexistence of soliton singlets and molecules in an all-fiber laser. Optics<br>Letters, 2019, 44, 4263.  | 3.3  | 22        |
| 252 | Resonance-temperature-insensitive phase-shifted long-period fiber gratings induced by surface deformation with anomalous strain characteristics. Optics Letters, 2005, 30, 1788.                           | 3.3  | 21        |

| #   | Article   | IF   | CITATIONS |
|-----|---|------|-----------|
| 253 | Colorimetric surface plasmon resonance imaging (SPRI) biosensor array based on polarization orientation. Biosensors and Bioelectronics, 2013, 47, 545-552.                          | 10.1 | 21        |
| 254 | Dual-state dissipative solitons from an all-normal-dispersion erbium-doped fiber laser: continuous wavelength tuning and multi-wavelength emission. Optics Letters, 2015, 40, 2684. | 3.3  | 21        |
| 255 | Novel design of N-dimensional CAP filters for 10  Gb/s CAP-PON system. Optics Letters, 2015, 40, 2409.  | 3.3  | 21        |
| 256 | Rapid SERS monitoring of lipidâ€peroxidationâ€derived protein modifications in cells using photonic<br>crystal fiber sensor. Journal of Biophotonics, 2016, 9, 32-37.               | 2.3  | 21        |
| 257 | Distal End Force Sensing with Optical Fiber Bragg Gratings for Tendon-Sheath Mechanisms in Flexible<br>Endoscopic Robots. , 2018, , .   |      | 21        |
| 258 | Heterostructured photonic crystal fiber. IEEE Photonics Technology Letters, 2005, 17, 1438-1440.  | 2.5  | 20        |
| 259 | Dual-wavelength 10-GHz actively mode-locked erbium fiber laser incorporating highly nonlinear fibers. IEEE Photonics Technology Letters, 2005, 17, 2547-2549.                       | 2.5  | 20        |
| 260 | Single-frequency 1060 nm semiconductor-optical-amplifier-based fiber laser with 40 nm tuning range.<br>Optics Letters, 2009, 34, 2204.  | 3.3  | 20        |
| 261 | Nonlinear coupling of relative intensity noise from pump to a fiber ring laser mode-locked with carbon nanotubes. Optics Express, 2010, 18, 16663.                                  | 3.4  | 20        |
| 262 | Modeling and analysis of localized biosensing and index sensing by introducing effective phase shift<br>in microfiber Bragg grating (µFBG). Optics Express, 2011, 19, 8930.         | 3.4  | 20        |
| 263 | Cavity-length optimization for high energy pulse generation in a long cavity passively mode-locked all-fiber ring laser. Applied Optics, 2012, 51, 3726.                            | 1.8  | 20        |
| 264 | Analytical Investigation on Self-Homodyne Coherent System Based on Few-Mode Fiber. IEEE Photonics<br>Technology Letters, 2014, 26, 74-77.   | 2.5  | 20        |
| 265 | Randomly spaced chirped grating-based random fiber laser. Applied Physics B: Lasers and Optics, 2018, 124, 1.   | 2.2  | 20        |
| 266 | Coupling coefficient of two-core microstructured optical fiber. Optics Communications, 2006, 260, 164-169.  | 2.1  | 19        |
| 267 | Experimental Demonstration of Multipoint Temperature Warning Sensor Using a Multichannel<br>Matched Fiber Bragg Grating. IEEE Photonics Technology Letters, 2008, 20, 933-935.      | 2.5  | 19        |
| 268 | Miniature temperature sensor with germania-core optical fiber. Optics Express, 2015, 23, 17687.   | 3.4  | 19        |
| 269 | Feed-forward carrier phase recovery for offset-QAM Nyquist WDM transmission. Optics Express, 2015, 23, 6215.  | 3.4  | 19        |
| 270 | Experimental Demonstration of Bidirectional OFDM/OQAM-MIMO Signal Over a Multicore Fiber<br>System. IEEE Photonics Journal, 2016, 8, 1-8.   | 2.0  | 19        |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 271 | High-frequency reverse-time chaos generation using an optical matched filter. Optics Letters, 2016, 41, 1157.   | 3.3 | 19        |
| 272 | An Optically Coupled Electro-Optic Chaos System With Suppressed Time-Delay Signature. IEEE<br>Photonics Journal, 2017, 9, 1-9.  | 2.0 | 19        |
| 273 | Multifiber angular compounding optical coherence tomography for speckle reduction. Optics Letters, 2017, 42, 125.   | 3.3 | 19        |
| 274 | Real-Time Multi-Class Disturbance Detection for $\hat{I}_1^1$ -OTDR Based on YOLO Algorithm. Sensors, 2022, 22, 1994.   | 3.8 | 19        |
| 275 | Propagation of short pulses in an active nonlinear two-core optical fiber. IEEE Journal of Quantum<br>Electronics, 2004, 40, 1597-1602.   | 1.9 | 18        |
| 276 | Tunable WDM filter with 0.8-nm channel spacing using a pair of long-period fiber gratings. IEEE<br>Photonics Technology Letters, 2005, 17, 795-797.                                     | 2.5 | 18        |
| 277 | Analytical Solution for SOA-Based All-Optical Wavelength Conversion Using Transient Cross-Phase<br>Modulation. IEEE Photonics Technology Letters, 2006, 18, 2554-2556.                  | 2.5 | 18        |
| 278 | Optical Bistability in Periodic Media with Third-, Fifth-, and Seventh-Order Nonlinearities. Journal of<br>Lightwave Technology, 2007, 25, 875-882.                                     | 4.6 | 18        |
| 279 | SOA Nonlinear Polarization Rotation With Linear Polarization Maintenance: Characterization and Applications. IEEE Journal of Selected Topics in Quantum Electronics, 2008, 14, 816-825. | 2.9 | 18        |
| 280 | Instantaneous Microwave Frequency Measurement Using Programmable Differential Group Delay<br>(DGD) Modules. IEEE Photonics Journal, 2010, 2, 967-973.                                   | 2.0 | 18        |
| 281 | Relative phase noise induced impairment in M-ary phase-shift-keying coherent optical communication system using distributed fiber Raman amplifier. Optics Letters, 2013, 38, 1055.      | 3.3 | 18        |
| 282 | Photonic Generation of Frequency-Quadrupled Microwave Signal With Tunable Phase Shift. IEEE<br>Photonics Technology Letters, 2014, 26, 220-223.   | 2.5 | 18        |
| 283 | Highly Sensitive Photonic Crystal Fiber-Based Refractive Index Sensing Using Mechanical Long-Period<br>Grating. IEEE Photonics Technology Letters, 2008, 20, 1688-1690.                 | 2.5 | 17        |
| 284 | Design and analysis of thermally tunable liquid crystal filled hybrid photonic crystal fiber coupler.<br>Optics Communications, 2009, 282, 2343-2347.                                   | 2.1 | 17        |
| 285 | Broadband transmission in hollow-core Bragg fibers with geometrically distributed multilayered cladding. Optics Express, 2010, 18, 18671.   | 3.4 | 17        |
| 286 | Timing-jitter reduction of passively mode-locked fiber laser with a carbon nanotube saturable absorber by optimization of cavity loss. Optics Letters, 2010, 35, 1085.                  | 3.3 | 17        |
| 287 | Compact refractometer based on extrinsic-phase-shift fiber Bragg grating. Sensors and Actuators A:<br>Physical, 2011, 168, 46-50.   | 4.1 | 17        |
| 288 | Noise conversion from pump to the passively mode-locked fiber lasers at 15Âμm. Optics Letters, 2012, 37, 1901.  | 3.3 | 17        |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 289 | Efficient phase-matched third harmonic generation in an asymmetric plasmonic slot waveguide. Optics<br>Express, 2014, 22, 18612.  | 3.4 | 17        |
| 290 | Relative Phase Noise-Induced Phase Error and System Impairment in Pump Depletion/Nondepletion<br>Regime. Journal of Lightwave Technology, 2014, 32, 2277-2286.  | 4.6 | 17        |
| 291 | Electro-optic chaotic system based on the reverse-time chaos theory and a nonlinear hybrid feedback<br>loop. Optics Express, 2016, 24, 28804.   | 3.4 | 17        |
| 292 | Light velocity control in monolithic microfiber bridged ring resonator. Optica, 2017, 4, 945.   | 9.3 | 17        |
| 293 | Secure Key Distribution Strategy in OFDM-PON by Utilizing the Redundancy of Training Symbol and Digital Chaos Technique. IEEE Photonics Journal, 2018, 10, 1-8.   | 2.0 | 17        |
| 294 | Formation of ultra-flexible, conformal, and nano-patterned photonic surfaces <i>via</i> polymer cold-drawing. Journal of Materials Chemistry C, 2018, 6, 4649-4657.   | 5.5 | 17        |
| 295 | Review on Photonic Crystal Fibers With Hybrid Guiding Mechanisms. IEEE Access, 2019, 7, 67469-67482.  | 4.2 | 17        |
| 296 | Research on Fabrication and Sensing Properties of Fiber-Coupled Whispering Gallery Mode<br>Microsphere Resonator. IEEE Sensors Journal, 2020, 20, 833-841.  | 4.7 | 17        |
| 297 | 660GHz Solitons Source Based on Modulation Instability in Short Cavity. Optics Express, 2003, 11, 2480.   | 3.4 | 16        |
| 298 | Photonic Generation of Frequency-Tunable Microwave Signals Using an Array of Uniformly Spaced Optical Combs. Journal of Lightwave Technology, 2012, 30, 3164-3172.  | 4.6 | 16        |
| 299 | High-energy dissipative soliton with MHz repetition rate from an all-fiber passively mode-locked laser.<br>Optics Communications, 2012, 285, 2422-2425.   | 2.1 | 16        |
| 300 | Pump RIN-induced impairments in unrepeatered transmission systems using distributed Raman amplifier.<br>Optics Express, 2015, 23, 11838.  | 3.4 | 16        |
| 301 | Dispersion-Managed Soliton Molecules in a Near Zero-Dispersion Fiber Laser. IEEE Photonics Journal, 2018, 10, 1-10.   | 2.0 | 16        |
| 302 | Synchronized Random Bit Sequences Generation Based on Analog-Digital Hybrid Electro-Optic Chaotic<br>Sources. Journal of Lightwave Technology, 2018, 36, 4995-5002.   | 4.6 | 16        |
| 303 | Bubble microcavity strain and gravity sensor with temperature and bending insensitivity using an ultra-thin core optical fiber. Optics and Laser Technology, 2021, 142, 107193.                               | 4.6 | 16        |
| 304 | Sensitivity Enhanced Refractive Index Sensor With In-Line Fiber Mach-Zehnder Interferometer Based on<br>Double-Peanut and Er-Doped Fiber Taper Structure. Journal of Lightwave Technology, 2022, 40, 245-251. | 4.6 | 16        |
| 305 | Fast Hankel transform and its application for studying the propagation of cylindrical electromagnetic fields. Optics Express, 2002, 10, 521.  | 3.4 | 15        |
| 306 | Effects of intermodal dispersion on two-nonidentical-core coupler with different radii. IEEE<br>Photonics Technology Letters, 2002, 14, 1106-1108.  | 2.5 | 15        |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 307 | Dynamic Properties of Double-Pass Discrete Raman Amplifier With FBG-Based All-Optical Gain Clamping<br>Techniques. IEEE Photonics Technology Letters, 2004, 16, 768-770.            | 2.5 | 15        |
| 308 | Tunable Compensation of First-Order PMD Using a High-Birefringence Linearly Chirped Fiber Bragg<br>Grating. IEEE Photonics Technology Letters, 2004, 16, 846-848.                   | 2.5 | 15        |
| 309 | Antiguiding in microstructured optical fibers. Optics Express, 2004, 12, 104.   | 3.4 | 15        |
| 310 | Tunable photonic microwave bandpass filter using phase Modulation and a chirped fiber grating in a<br>Sagnac loop. IEEE Photonics Technology Letters, 2005, 17, 1935-1937.          | 2.5 | 15        |
| 311 | Radially graded index whispering gallery mode resonator for penetration enhancement. Optics<br>Express, 2012, 20, 26285.  | 3.4 | 15        |
| 312 | Relative phase noise estimation and mitigation in Raman amplified coherent optical communication system. Optics Express, 2014, 22, 1257.  | 3.4 | 15        |
| 313 | Characterization of Fiber Bragg Grating Inscribed in Few-Mode Silica-Germanate Fiber. IEEE Photonics<br>Technology Letters, 2014, 26, 1908-1911.                                    | 2.5 | 15        |
| 314 | Low-complexity feed-forward carrier phase estimation for M-ary QAM based on phase search acceleration by quadratic approximation. Optics Express, 2015, 23, 19142.                  | 3.4 | 15        |
| 315 | Experimental demonstration of a 10  Gb/s non-orthogonal multi-dimensional CAP-PON system based on the ISI and CCI cancellation algorithm. Optics Letters, 2016, 41, 3988.           | 3.3 | 15        |
| 316 | M-OTDR sensing system based on 3D encoded microstructures. Scientific Reports, 2017, 7, 41137.  | 3.3 | 15        |
| 317 | Highly Stable and Precise Demodulation of an FBC-Based Optical Current Sensor Using a Dual-Loop<br>Optoelectronic Oscillator. Journal of Lightwave Technology, 2021, 39, 5962-5972. | 4.6 | 15        |
| 318 | Optical curvature sensor with high resolution based on in-line fiber Mach-Zehnder interferometer and microwave photonic filter. Optics Express, 2022, 30, 5402.                     | 3.4 | 15        |
| 319 | Honeycomb Photonic Bandgap Fiber With a Modified Core Design. IEEE Photonics Technology Letters, 2004, 16, 2051-2053.   | 2.5 | 14        |
| 320 | Promising compact wavelength-tunable optical add–drop multiplexer in dense wavelength-division<br>multiplexing systems. Optics Letters, 2004, 29, 682.                              | 3.3 | 14        |
| 321 | Four-wave mixing assisted self-stable 4×10 GHz actively mode-locked Erbium fiber ring laser. Optics<br>Express, 2006, 14, 1726.   | 3.4 | 14        |
| 322 | Simultaneous measurement of force and temperature based on a half corroded FBG. Microwave and Optical Technology Letters, 2010, 52, 2020-2023.                                      | 1.4 | 14        |
| 323 | Comb Filter-Based Fiber-Optic Methane Sensor System With Mitigation of Cross Gas Sensitivity.<br>Journal of Lightwave Technology, 2012, 30, 3103-3109.                              | 4.6 | 14        |
| 324 | ICI Mitigation for Dual-Carrier Superchannel Transmission Based on m-PSK and m-QAM Formats.<br>Journal of Lightwave Technology, 2016, 34, 5526-5533.                                | 4.6 | 14        |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 325 | Compact Temperature Sensor With Highly Germania-Doped Fiber-Based Michelson Interferometer. IEEE<br>Sensors Journal, 2018, 18, 8017-8021.   | 4.7 | 14        |
| 326 | Plasmonically enhanced photoluminescence of monolayer MoS <sub>2</sub> via nanosphere lithography-templated gold metasurfaces. Nanophotonics, 2021, 10, 1733-1740.                                | 6.0 | 14        |
| 327 | EDFA gain flattening using phase-shifted long-period grating. Microwave and Optical Technology<br>Letters, 2003, 37, 153-157.   | 1.4 | 13        |
| 328 | Design and analysis of anti-resonant reflecting photonic crystal VCSEL lasers. Optics Express, 2004, 12, 4269.  | 3.4 | 13        |
| 329 | Wide-passband, temperature-insensitive, and compact ï€-phase-shifted long-period gratings in endlessly single-mode photonic crystal fiber. Optics Letters, 2004, 29, 2608.                        | 3.3 | 13        |
| 330 | High-resolution photonic bandgap fiber-based biochemical sensor. Journal of Biomedical Optics, 2007, 12, 044022.  | 2.6 | 13        |
| 331 | Investigation of thermal influence on the bandgap properties of liquid-crystal photonic crystal fibers. Optics Communications, 2008, 281, 4339-4342.  | 2.1 | 13        |
| 332 | Frequency Response of the Noise Conversion From Relative Intensity Noise to Phase Noise in the<br>Photodetection of an Optical Pulse Train. IEEE Photonics Technology Letters, 2011, 23, 468-470. | 2.5 | 13        |
| 333 | Single-wavelength-pump bi-directional hybrid fiber amplifier for bi-directional local area network application. Optics Communications, 2011, 284, 573-578.  | 2.1 | 13        |
| 334 | All-glass leakage channel fibers with triangular core for achieving large mode area and low bending<br>loss. Optics Communications, 2011, 284, 1811-1814.   | 2.1 | 13        |
| 335 | Laser-assisted lateral optical fiber processing for selective infiltration. Optics Express, 2014, 22, 2675.   | 3.4 | 13        |
| 336 | Fundamental and Third Harmonic Mode Coupling Induced Single Soliton Generation in Kerr<br>Microresonators. Journal of Lightwave Technology, 2019, 37, 5531-5536.                                  | 4.6 | 13        |
| 337 | An ultrahighly sensitive photonic crystal fiber based surface plasmon resonance sensor. Optik, 2020,<br>212, 164649.  | 2.9 | 13        |
| 338 | Temperature Sensor Based on Er-Doped Cascaded-Peanut Taper Structure In-Line Interferometer in<br>Fiber Ring Laser. IEEE Sensors Journal, 2021, 21, 21594-21599.                                  | 4.7 | 13        |
| 339 | Ultrasensitive Broadband Refractometer Based on Single Stress-Applying Fiber at Dispersion Turning<br>Point. Journal of Lightwave Technology, 2021, 39, 2528-2535.                                | 4.6 | 13        |
| 340 | Design and analysis of slow-light Bloch slot waveguides for on-chip gas sensing. Journal of the<br>Optical Society of America B: Optical Physics, 2020, 37, 257.                                  | 2.1 | 13        |
| 341 | Single-axis soliton molecule and multiple solitons generation from a vector fiber laser. Optics Express, 2020, 28, 5212.  | 3.4 | 13        |
| 342 | Study on the dual-Fano resonance generation and its potential for self-calibrated sensing. Optics<br>Express, 2020, 28, 23703.  | 3.4 | 13        |

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 343 | Strain sensitivity enhancement based on periodic deformation in hollow core fiber. Optics Letters, 2020, 45, 3997.   | 3.3 | 13        |
| 344 | Fiber Bragg grating accelerometer with temperature insensitivity. Microwave and Optical Technology<br>Letters, 2003, 37, 151-153.  | 1.4 | 12        |
| 345 | Channel allocation algorithm for WDM systems. Optics Express, 2003, 11, 1322.  | 3.4 | 12        |
| 346 | Bidirectional optical bistability in a dual-pumped erbium doped fiber ring laser. Optics Express, 2004, 12, 5640.  | 3.4 | 12        |
| 347 | Broad-band tunable wavelength conversion using Raman-assisted parametric four-wave mixing in<br>highly nonlinear fibers with double-pass geometry. IEEE Photonics Technology Letters, 2005, 17,<br>148-150.                        | 2.5 | 12        |
| 348 | Generalized frequency dependence of output Stokes parameters in an optical fiber system with PMD and PDL/PDG. Optics Express, 2005, 13, 8875.  | 3.4 | 12        |
| 349 | Tunable and Switchable Fiber Ring Laser Among Four Wavelengths With Ultranarrow Wavelength<br>Spacing Using a Quadruple-Transmission-Band Fiber Bragg Grating Filter. IEEE Photonics Technology<br>Letters, 2006, 18, 2038-2040.   | 2.5 | 12        |
| 350 | Analysis of perturbed Bragg fibers with an extended transfer matrix method. Optics Express, 2006, 14, 2596.  | 3.4 | 12        |
| 351 | Influence of Sidelobes on Fiber-Bragg-Grating-Based \$Q\$-switched Fiber Laser. IEEE Photonics<br>Technology Letters, 2007, 19, 1646-1648.   | 2.5 | 12        |
| 352 | Generalized Finite-Difference Time-Domain Method Utilizing Auxiliary Differential Equations for the<br>Full-Vectorial Analysis of Photonic Crystal Fibers. IEEE Photonics Technology Letters, 2007, 19,<br>1970-1972.              | 2.5 | 12        |
| 353 | Polarization-Dependent Bandgap Splitting and Mode Guiding in Liquid Crystal Photonic Bandgap Fibers.<br>Journal of Lightwave Technology, 2008, 26, 3650-3659.  | 4.6 | 12        |
| 354 | Analytical method for band structure calculation of photonic crystal fibers filled with liquid crystal. Optics Express, 2008, 16, 6668.  | 3.4 | 12        |
| 355 | 40 Gb/s Multifunction Optical Format Conversion Module With Wavelength Multicast Capability<br>Using Nondegenerate Four-Wave Mixing in a Semiconductor Optical Amplifier. Journal of Lightwave<br>Technology, 2009, 27, 4446-4454. | 4.6 | 12        |
| 356 | Characterization of the Excess Noise Conversion From Optical Relative Intensity Noise in the<br>Photodetection of Mode-Locked Lasers for Microwave Signal Synthesis. Journal of Lightwave<br>Technology, 2011, 29, 3622-3631.      | 4.6 | 12        |
| 357 | High performance spectral-phase surface plasmon resonance biosensors based on single- and double-layer schemes. Optics Communications, 2013, 291, 470-475.   | 2.1 | 12        |
| 358 | Biconical-taper-assisted fiber interferometer with modes coupling enhancement for high-sensitive curvature measurement. Applied Physics B: Lasers and Optics, 2014, 115, 1-8.  | 2.2 | 12        |
| 359 | Switchable Dual-Wavelength Mode-Locking of Thulium-Doped Fiber Laser Based on SWNTs. IEEE<br>Photonics Technology Letters, 2016, 28, 2019-2022.  | 2.5 | 12        |
| 360 | Experimental Demonstration of Ultra-Dense WDM-PON With Seven-Core MCF-Enabled Self-Homodyne<br>Coherent Detection. IEEE Photonics Journal, 2017, 9, 1-7.   | 2.0 | 12        |

| #   | Article   | IF              | CITATIONS  |
|-----|---|-----------------|------------|
| 361 | Hybrid photonic crystal fiber for highly sensitive temperature measurement. Journal of Optics (United) Tj ETQq1 1   | 0,784314<br>2.2 | rgBT /Over |
| 362 | Vectorial Nature in Nonlinear Multimode Interference Based Ultrafast Fiber Lasers. IEEE Photonics<br>Journal, 2020, 12, 1-10.   | 2.0             | 12         |
| 363 | Simultaneous achievement of an ultrashort length and a high extinction ratio polarization splitter<br>based on the dual-core photonic crystal fiber with Ge <sub>20</sub> Sb <sub>15</sub> Se <sub>65</sub><br>glass. Applied Optics, 2019, 58, 7892. | 1.8             | 12         |
| 364 | Harnessing oversampling in correlation-coded OTDR. Optics Express, 2019, 27, 1693.  | 3.4             | 12         |
| 365 | Volumetric enhancement of Raman scattering for fast detection based on a silver-lined hollow-core fiber. Optics Express, 2019, 27, 10370.   | 3.4             | 12         |
| 366 | FSR-tunable fabry-Pe/spl acute/rot filter with superimposed chirped fiber Bragg gratings. IEEE<br>Photonics Technology Letters, 2006, 18, 184-186.  | 2.5             | 11         |
| 367 | Experimental demonstration of polarization multiplexing for simultaneously providing broadband wireless and wired access. Optics Communications, 2008, 281, 2806-2810.  | 2.1             | 11         |
| 368 | Four-Wave Mixing of Pulsed Signal in Dispersion-Shifted Fiber With Pump Depletion. IEEE Photonics<br>Technology Letters, 2008, 20, 1231-1233.   | 2.5             | 11         |
| 369 | Analysis of hollow-core photonic bandgap fibers for evanescent wave biosensing. Journal of<br>Biomedical Optics, 2008, 13, 054048.  | 2.6             | 11         |
| 370 | Polarization Effects in Microfiber Loop and Knot Resonators. IEEE Photonics Technology Letters, 2010, 22, 586-588.  | 2.5             | 11         |
| 371 | A fast and robust blind chromatic dispersion estimation based on fractional fourier transformation. , 2015, , .   |                 | 11         |
| 372 | Internal motions of harmonically mode-locked soliton molecules in a NPR based fiber laser. Optics Communications, 2021, 486, 126790.  | 2.1             | 11         |
| 373 | Near-infrared long-range surface plasmon resonance in a D-shaped honeycomb microstructured optical fiber coated with Au film. Optics Express, 2021, 29, 16455.  | 3.4             | 11         |
| 374 | Design of an arbitrary ratio optical power splitter based on a discrete differential multiobjective evolutionary algorithm. Applied Optics, 2020, 59, 1780.   | 1.8             | 11         |
| 375 | Concentration-induced nonuniform power in tunable erbium-doped fiber lasers. Optics Letters, 2004, 29, 358.   | 3.3             | 10         |
| 376 | Fabrication of all-solid photonic bandgap fiber coupler. Optics Letters, 2007, 32, 3059.  | 3.3             | 10         |
| 377 | Silica-Based Birefringent Large-Mode-Area Fiber With a Nanostructure Core. IEEE Photonics<br>Technology Letters, 2008, 20, 246-248.   | 2.5             | 10         |
| 378 | Study of Polarization-Dependent Bandgap Formation in Liquid Crystal Filled Photonic Crystal Fibers.<br>IEEE Photonics Technology Letters, 2008, 20, 602-604.  | 2.5             | 10         |

| #   | Article   | IF         | CITATIONS     |
|-----|---|------------|---------------|
| 379 | A Tunable Lyot Birefringent Filter With Variable Channel Spacing and Wavelength Using Nonlinear<br>Polarization Rotation in an SOA. IEEE Photonics Technology Letters, 2008, 20, 1527-1529.                           | 2.5        | 10            |
| 380 | Effect of input states of polarization on the measurement error of Mueller matrix in a system having small polarization-dependent loss or gain. Optics Express, 2009, 17, 13017.                                      | 3.4        | 10            |
| 381 | Temperature-Sensitive Photonic Liquid Crystal Fiber Modal Interferometer. IEEE Photonics Journal, 2012, 4, 1855-1860.   | 2.0        | 10            |
| 382 | Efficient Third-Harmonic Generation From 2 <formula formulatype="inline"><tex<br>Notation="TeX"&gt;\$mu hbox{m}\$</tex<br></formula> in Asymmetric Plasmonic Slot<br>Waveguide. IEEE Photonics Journal, 2014, 6, 1-7. | 2.0        | 10            |
| 383 | Third harmonic generation from mid-IR to near-IR regions in a phase-matched<br>silicon-silicon-nanocrystal hybrid plasmonic waveguide. Optics Express, 2014, 22, 24367.   | 3.4        | 10            |
| 384 | Experimental Demonstration of Nonlinearity and Phase Noise Tolerant 16-QAM OFDM W-Band (75–110) Tj ETO  | QqQ 0 0 rg | gBT /Overlock |
| 385 | Wideband Microfiber Fabry–Pérot Filter and Its Application to Multiwavelength Fiber Ring Laser. IEEE<br>Photonics Technology Letters, 2014, 26, 961-964.  | 2.5        | 10            |
| 386 | Study on the crucial conditions for efficient third harmonic generation using a metal-hybrid-metal plasmonic slot waveguide. Optics Express, 2015, 23, 253.   | 3.4        | 10            |
| 387 | Coupling-length phase matching for efficient third-harmonic generation based on parallel-coupled waveguides. Optics Letters, 2015, 40, 894.   | 3.3        | 10            |
| 388 | Experimental Demonstration of a 16.27 Gb/s 2-D Coherent Optical OFDM System With 3-D Signal Mapper and 2-D IFFT Modulator. Journal of Lightwave Technology, 2016, 34, 1177-1183.                                      | 4.6        | 10            |
| 389 | Impact of Sampling Source Repetition Frequency in Linear Optical Sampling. IEEE Photonics Technology<br>Letters, 2016, 28, 15-18.   | 2.5        | 10            |
| 390 | Characterization and Optimization of Unrepeatered Coherent Transmission Systems Using DRA and ROPA. Journal of Lightwave Technology, 2017, 35, 1830-1836.   | 4.6        | 10            |
| 391 | Switchable Single-Longitudinal-Mode Fiber Laser Based on \$heta\$ -Shaped Microfiber Filter. IEEE<br>Photonics Technology Letters, 2018, 30, 479-482.   | 2.5        | 10            |
| 392 | Scalar and Vector Solitons in a Bidirectional Mode-Locked Fibre Laser. Journal of Lightwave Technology, 2019, 37, 5108-5114.  | 4.6        | 10            |
| 393 | PCF based surface plasmon resonance temperature sensor with ultrahigh sensitivity. Optik, 2022, 250, 168345.  | 2.9        | 10            |
| 394 | Effects of Intermodal Dispersion on Short Pulse Propagation in an Active Nonlinear Two-Core Fiber<br>Coupler. IEEE Photonics Technology Letters, 2004, 16, 1080-1082.   | 2.5        | 9             |
| 395 | Special control of the cutoff frequencies in a 2D photonic crystal coupled-cavity waveguide. Optics Communications, 2007, 276, 93-96.   | 2.1        | 9             |
| 396 | A Wavelength-Division-Multiplexed Passive Optical Network With Simultaneous Centralized Light<br>Source and Broadcast Capability. IEEE Photonics Journal, 2010, 2, 445-453.   | 2.0        | 9             |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 397 | Tunable microwave generation based on a dual-wavelength fiber laser with an inverse-Gaussian apodized fiber Bragg grating. Applied Optics, 2011, 50, 4912.                                    | 2.1 | 9         |
| 398 | Instantaneous microwave frequency measurement using optical carrier suppression based DC power monitoring. Optics Express, 2011, 19, 24712.   | 3.4 | 9         |
| 399 | Highly sensitive pressure-induced plasmon resonance birefringence in a silver-coated photonic crystal fiber. Journal of Physics: Conference Series, 2011, 276, 012102.                        | 0.4 | 9         |
| 400 | Investigation of Axial Strain Effects on Microwave Signals from a PM-EDF Short Cavity DBR Laser for Sensing Applications. IEEE Photonics Journal, 2012, 4, 1530-1535.                         | 2.0 | 9         |
| 401 | Programmable all-fiber structured waveshaper based on linearly chirped fiber Bragg grating and digital thermal controller. Applied Physics B: Lasers and Optics, 2013, 112, 479-484.          | 2.2 | 9         |
| 402 | Synthesis of size-controlled silver nanodecahedrons and their application for core–shell surface enhanced Raman scattering (SERS) tags. RSC Advances, 2013, 3, 966-974.                       | 3.6 | 9         |
| 403 | All-optical non-conjugated wavelength multicasting of QPSK signal with capability of phase regeneration. Optics Express, 2014, 22, 22996.   | 3.4 | 9         |
| 404 | The Role of Effective Area in the Design of Weakly Coupled MCF: Optimization Guidance and OSNR<br>Improvement. IEEE Journal of Selected Topics in Quantum Electronics, 2016, 22, 81-87.       | 2.9 | 9         |
| 405 | Extremely High-Efficiency Coupling Method for Hollow-Core Photonic Crystal Fiber. IEEE Photonics<br>Journal, 2017, 9, 1-8.  | 2.0 | 9         |
| 406 | 900 nm waveband four wave mixing generation in highly nonlinear photonic crystal fiber. Journal of<br>Optics (United Kingdom), 2018, 20, 035501.  | 2.2 | 9         |
| 407 | Photon–Plasmon Coupling for Fundamental-Mode Phase-Matched Third Harmonic and Triplet Photon<br>Generation. Journal of Lightwave Technology, 2018, 36, 3892-3897.                             | 4.6 | 9         |
| 408 | Investigation of a Bragg Grating-Based Fabry–Perot Structure Inscribed Using Femtosecond Laser<br>Micromachining in an Adiabatic Fiber Taper. Applied Sciences (Switzerland), 2020, 10, 1069. | 2.5 | 9         |
| 409 | High-resolution, large-dynamic-range multimode interferometer sensor based on a suspended-core microstructured optical fiber. Optics Letters, 2020, 45, 1017.                                 | 3.3 | 9         |
| 410 | Regenerative Er-doped Fiber Amplifier System for High-repetition-rate Optical Pulses. Journal of the Optical Society of Korea, 2013, 17, 357-361.   | 0.6 | 9         |
| 411 | Time-slot multiplexing based bandwidth enhancement for fiber distributed acoustic sensing. Science China Information Sciences, 2022, 65, 1.   | 4.3 | 9         |
| 412 | Theoretical investigation of fiber Raman amplifier with dynamic gain control. , 0, , .  |     | 8         |
| 413 | Wide bandwidth flat gain Raman amplifier by using polarization-independent interferometric filter.<br>Optics Express, 2003, 11, 2991.   | 3.4 | 8         |
| 414 | Hole-Assisted Multiring Fiber With Low Dispersion Around 1550 nm. IEEE Photonics Technology<br>Letters, 2004, 16, 123-125.  | 2.5 | 8         |

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 415 | Measurement of SOA Linewidth Enhancement Factor With a Sagnac Fiber Loop. IEEE Photonics<br>Technology Letters, 2006, 18, 1934-1936.   | 2.5 | 8         |
| 416 | Polarization-Dependent Locking in SOA Harmonic Mode-Locked Fiber Laser. IEEE Photonics Technology<br>Letters, 2006, 18, 2404-2406.   | 2.5 | 8         |
| 417 | Guidance varieties in photonic crystal fibers. Journal of the Optical Society of America B: Optical Physics, 2006, 23, 1684.   | 2.1 | 8         |
| 418 | Dynamic multicast routing and wavelength assignment using generic graph model for wavelength-division-multiplexing networks. IET Communications, 2008, 2, 951.                                     | 2.2 | 8         |
| 419 | Free-spectral range tunable Fabry–Perot filter with superimposed fiber Bragg gratings. Optics<br>Communications, 2009, 282, 4729-4732.   | 2.1 | 8         |
| 420 | All-optical NRZ-OOK-to-RZ-OOK format conversions with tunable duty cycles using nonlinear polarization rotation of a semiconductor optical amplifier. Optics Communications, 2009, 282, 2143-2146. | 2.1 | 8         |
| 421 | A Robust and Efficient Frequency Offset Correction Algorithm With Experimental Verification for Coherent Optical OFDM System. Journal of Lightwave Technology, 2015, 33, 3801-3807.                | 4.6 | 8         |
| 422 | Linewidth-Tolerant Joint Digital Signal Processing for 16QAM Nyquist WDM Superchannel. IEEE<br>Photonics Technology Letters, 2015, 27, 129-132.  | 2.5 | 8         |
| 423 | Performance Comparison of Offset-16QAM and 16QAM for Nyquist WDM Superchannel With Digital Spectral Shaping. Journal of Lightwave Technology, 2015, 33, 3623-3629.                                 | 4.6 | 8         |
| 424 | Plasmonic nanopore-based platforms for single-molecule Raman scattering. Optics Communications, 2016, 372, 113-117.  | 2.1 | 8         |
| 425 | All-Optical Implementation of the Ant Colony Optimization Algorithm. Scientific Reports, 2016, 6, 26283.   | 3.3 | 8         |
| 426 | Sensitivity Enhanced Refractive Index Fiber Sensor Based on Long-Range Surface Plasmon Resonance in<br>SiO2-Au-TiO2 Heterostructure. Photonics, 2021, 8, 379.                                      | 2.0 | 8         |
| 427 | High sensitivity liquid level sensor based on a hollow core fiber structure. Optics Communications, 2021, 499, 127279.   | 2.1 | 8         |
| 428 | Multiplexed polarization OTDR system with high DOP and ability of multi-event detection. Applied Optics, 2017, 56, 3709.   | 2.1 | 8         |
| 429 | Graphene Enhanced Surface Plasmon Resonance Fiber-Optic Biosensor. , 2016, , .   |     | 8         |
| 430 | Ultra-low sampling resolution technique for heterodyne phase-OTDR based distributed acoustic sensing. Optics Letters, 2022, 47, 3379.  | 3.3 | 8         |
| 431 | Gain Properties of multi-wavelength time division multiplexed Raman amplifier. Optics Express, 2006,<br>14, 5061.  | 3.4 | 7         |
| 432 | Coherence-free microwave photonic notch filter with a single driver intensity modulator in a Sagnac<br>fiber loop. Applied Optics, 2007, 46, 7179.   | 2.1 | 7         |

| #   | Article   | IF   | CITATIONS |
|-----|---|------|-----------|
| 433 | Virtual Generalized Mueller Matrix Method for Measurement of Complex Polarization-Mode<br>Dispersion Vector in Optical Fibers. IEEE Photonics Technology Letters, 2007, 19, 27-29.                                    | 2.5  | 7         |
| 434 | Analytical Design of SPM-Limited Systems With Optical Phase Conjugation. IEEE Photonics Technology<br>Letters, 2008, 20, 472-474.   | 2.5  | 7         |
| 435 | Properties of a vector soliton laser passively mode-locked by a fiber-based semiconductor saturable absorber operating in transmission. Optics Communications, 2011, 284, 619-624.                                    | 2.1  | 7         |
| 436 | Photonic generation of microwave waveforms with wide chirp tuning range. Optics Communications, 2013, 304, 102-106.   | 2.1  | 7         |
| 437 | A pump power controlled 1,060Ânm multiwavelength fiber ring laser using nonlinear polarization rotation of SOA. Applied Physics B: Lasers and Optics, 2013, 110, 445-449.   | 2.2  | 7         |
| 438 | Efficient phase-matched third harmonic generation in a metal-clad plasmonic double-slot waveguide.<br>Journal of Optics (United Kingdom), 2015, 17, 025506.   | 2.2  | 7         |
| 439 | Low-Complexity Carrier Phase Recovery Based on Constellation Classification for M-ary Offset-QAM<br>Signal. Journal of Lightwave Technology, 2016, 34, 1133-1140.   | 4.6  | 7         |
| 440 | Reproducible optical noise-like signal generation subjected by digital sequences. Optics Express, 2017, 25, 29189.  | 3.4  | 7         |
| 441 | Demonstration of arbitrary temporal shaping of picosecond pulses in a radially polarized Yb-fiber<br>MOPA with > 10 W average power. Optics Express, 2017, 25, 15402.   | 3.4  | 7         |
| 442 | Low-cost compressive sensing imaging based on spectrum-encoded time-stretch structure. Optics Express, 2021, 29, 14931.   | 3.4  | 7         |
| 443 | Design of highly sensitive interferometric sensors based on subwavelength grating waveguides operating at the dispersion turning point. Journal of the Optical Society of America B: Optical Physics, 2021, 38, 2680. | 2.1  | 7         |
| 444 | Nonlinear gas sensing based on third-harmonic generation in cascaded chalcogenide microfibers.<br>Journal of the Optical Society of America B: Optical Physics, 2019, 36, 300.  | 2.1  | 7         |
| 445 | Cellular-resolution in vivo tomography in turbid tissue through digital aberration correction.<br>PhotoniX, 2020, 1, .  | 13.5 | 7         |
| 446 | Out-of-plane dispersion of a two-dimensional photonic crystal. Physical Review B, 2007, 75, .   | 3.2  | 6         |
| 447 | Silica-Based Nanostructure Core Fiber. IEEE Photonics Technology Letters, 2008, 20, 162-164.  | 2.5  | 6         |
| 448 | Switchable Coherence-Free Microwave Photonic Notch Filter Using a Pair of Intensity Modulators.<br>IEEE Photonics Technology Letters, 2008, 20, 261-263.  | 2.5  | 6         |
| 449 | All-Fiber \${Q}\$-Switched Ring Laser With Increased Repetition Rate. IEEE Photonics Technology<br>Letters, 2008, 20, 764-766.  | 2.5  | 6         |
| 450 | Sampled longâ€period fiber grating filters with narrow stop bands. Microwave and Optical Technology<br>Letters, 2009, 51, 2401-2403.  | 1.4  | 6         |

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 451 | UWB Impulse Radio Transmitter Using an Electrooptic Phase Modulator Together With a Delay<br>Interferometer. IEEE Photonics Technology Letters, 2010, 22, 1479-1481.         | 2.5 | 6         |
| 452 | Photonic generation of millimeter-wave ultra-wideband signal using microfiber ring resonator.<br>Optics Communications, 2011, 284, 1803-1806.                                | 2.1 | 6         |
| 453 | Mode locking of an erbium-doped fiber laser with intra-cavity polarization modulation. Optics Communications, 2011, 284, 1026-1028.  | 2.1 | 6         |
| 454 | Photonic Generation of Tunable Continuous-Wave Microwave Signals Using a Temporally-Stretched and Chirped Pulse-Train. Journal of Lightwave Technology, 2012, 30, 1269-1277. | 4.6 | 6         |
| 455 | Modeling and Analysis of Fiber Bragg Grating Based Visible Pr \$^{3+}\$-Doped Fiber Lasers. Journal of Lightwave Technology, 2014, 32, 27-34.                                | 4.6 | 6         |
| 456 | Application of Coupled Optoelectronic Oscillator on Optical Sampling. Procedia Engineering, 2016, 140, 12-16.  | 1.2 | 6         |
| 457 | Third Harmonic Generation With the Effect of Nonlinear Loss. Journal of Lightwave Technology, 2016, 34, 1274-1280.   | 4.6 | 6         |
| 458 | Design of photonic crystal fiber with elliptical air-holes to achieve simultaneous high birefringence and nonlinearity. Chinese Physics B, 2018, 27, 014206.                 | 1.4 | 6         |
| 459 | Smart Office. , 2018, , .  |     | 6         |
| 460 | Photonic Crystal Fiber–Based Interferometric Sensors. , 0, , .   |     | 6         |
| 461 | Highly Sensitive Polarimetric Sensor Based on Fano Resonance for DNA Hybridization Detection.<br>Plasmonics, 2020, 15, 769-781.  | 3.4 | 6         |
| 462 | Simultaneous Mid-Infrared Gas Sensing and Upconversion Based on Third Harmonic Generation in Cascaded Waveguides. IEEE Photonics Journal, 2020, 12, 1-12.                    | 2.0 | 6         |
| 463 | Numerical Investigation of All-Optical Manipulation for Polarization-Multiplexed Cavity Solitons.<br>Journal of Lightwave Technology, 2021, 39, 582-591.                     | 4.6 | 6         |
| 464 | Manipulation of Soliton Bunches Generated From a Polarization-Route-Assisted Vector Fiber Laser.<br>IEEE Photonics Journal, 2021, 13, 1-8.                                   | 2.0 | 6         |
| 465 | In-Fiber Mach–Zehnder Interferometer Based on Er Doped Up-Taper and Peanut-Shaped Fiber Structure<br>in Fiber Ring Laser. IEEE Access, 2021, 9, 128126-128132.               | 4.2 | 6         |
| 466 | Mid-IR supercontinuum generation in a single-mode ZBLAN fiber by erbium-doped fiber laser. Optical<br>Engineering, 2018, 57, 1.  | 1.0 | 6         |
| 467 | Theoretical study of bicharacteristic waveguide for fundamental-mode phase-matched SHG from MIR to NIR. Optics Express, 2019, 27, 15236.                                     | 3.4 | 6         |
| 468 | Highly efficient single-pixel imaging system based on the STEAM structure. Optics Express, 2021, 29, 43203.  | 3.4 | 6         |

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 469 | Dynamics of cavity soliton driven by chirped optical pulses in Kerr resonators. Frontiers of<br>Optoelectronics, 2022, 15, 1.  | 3.7 | 6         |
| 470 | Improvement of Fourier series analysis technique by time-domain window function. IEEE Photonics<br>Technology Letters, 1996, 8, 1364-1366.   | 2.5 | 5         |
| 471 | Stability and Transient Analyses of Temporal Talbot-Effect-Based Repetition-Rate Multiplication Mode-Locked Laser Systems. IEEE Photonics Technology Letters, 2004, 16, 437-439.               | 2.5 | 5         |
| 472 | Two-states method for polarization dependent loss measurement. Optical Fiber Technology, 2007, 13, 139-142.  | 2.7 | 5         |
| 473 | All-optical NRZ-DPSK clock recovery using linearly chirped fiber Bragg grating induced clock tone.<br>Optical Fiber Technology, 2008, 14, 222-226.   | 2.7 | 5         |
| 474 | Novel tunable microwave photonic notch filter using a 3×3 coupler based Sagnac loop. Optics<br>Communications, 2008, 281, 1476-1479.   | 2.1 | 5         |
| 475 | Generation of Different Modulation Formats Using Sagnac Fiber Loop With One Electroabsorption<br>Modulator. IEEE Photonics Technology Letters, 2008, 20, 297-299.                              | 2.5 | 5         |
| 476 | Electrically ultra-fast tunable optical filter employing HiBi fiber and phase modulator. Optics<br>Communications, 2010, 283, 2662-2664.   | 2.1 | 5         |
| 477 | Single-Ended Measurement of Polarization-Dependent Loss in an Optical Fiber Link. IEEE Photonics<br>Technology Letters, 2011, 23, 185-187.   | 2.5 | 5         |
| 478 | Generation of flat supercontinuum for time-stretched analog-to-digital converters. , 2011, , .   |     | 5         |
| 479 | Photonic crystal fibers with high and flattened dispersion. Optics Communications, 2011, 284, 4176-4179.   | 2.1 | 5         |
| 480 | Design and numerical optimization of a mode multiplexer based on few-mode fiber couplers. Journal of Optics (United Kingdom), 2013, 15, 125404.  | 2.2 | 5         |
| 481 | Reconfigurable UWB pulse generator based on pulse shaping in a nonlinear optical loop mirror and differential detection. Optics Express, 2013, 21, 6401.                                       | 3.4 | 5         |
| 482 | Phase noise tolerant inter-carrier-interference cancellation for WDM superchannels with sub-Nyquist channel spacing. Optics Express, 2013, 21, 21569.  | 3.4 | 5         |
| 483 | Programmable wavelength-tunable second-order optical temporal differentiator based on a linearly chirped fiber Bragg grating and a digital thermal controller. Optics Letters, 2014, 39, 2004. | 3.3 | 5         |
| 484 | Design and Analysis of Microfluidic Optical Fiber Device for Refractive Index Sensing. IEEE Photonics<br>Technology Letters, 2014, 26, 2130-2133.  | 2.5 | 5         |
| 485 | Harmonic Generation Via χ3Intermodal Phase Matching in Microfibers. Fiber and Integrated Optics, 2015, 34, 53-65.  | 2.5 | 5         |
| 486 | Nanosecond Pulse Fiber Laser Blackening of Aluminum Alloy With Alumina Surface. IEEE Photonics<br>Technology Letters, 2016, 28, 2701-2704.   | 2.5 | 5         |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 487 | Temporal depolarization suppressed POTDR system for quasi-distributed instantaneous intrusion sensing and vibration frequency measurement. IEEE Photonics Journal, 2016, , 1-1.                           | 2.0 | 5         |
| 488 | Long-Period Gratings and Multimode Interference in Helical Single-Mode Fiber. IEEE Photonics<br>Technology Letters, 2019, 31, 1956-1959.  | 2.5 | 5         |
| 489 | Bragg Grating Assisted Sagnac Interferometer in SiO2-Al2O3-La2O3 Polarization-Maintaining Fiber for<br>Strain–Temperature Discrimination. Sensors, 2020, 20, 4772.  | 3.8 | 5         |
| 490 | Recent Advances and Prospects of Fiberâ€Shaped Rechargeable Aqueous Alkaline Batteries. Advanced<br>Energy and Sustainability Research, 2021, 2, 2100060.   | 5.8 | 5         |
| 491 | All-fiber online Raman sensor with enhancement via a Fabry–Perot cavity. Optics Letters, 2020, 45,<br>5760.   | 3.3 | 5         |
| 492 | Bragg labeled wavelength calibrates interferometric sensors in hollow core fiber. Optics Letters, 2019, 44, 5382.   | 3.3 | 5         |
| 493 | Tunable Electro-Optical and Thermal Optical Modulator Based on a Liquid Crystal-Filled Side Hole<br>Fiber in Fiber Ring Laser. IEEE Sensors Journal, 2021, 21, 27510-27517.                               | 4.7 | 5         |
| 494 | Fiber Optic Electric Field Intensity Sensor Based on Liquid Crystal-Filled Photonic Crystal Fiber<br>Incorporated Ring Laser. IEEE Photonics Journal, 2022, 14, 1-5.                                      | 2.0 | 5         |
| 495 | Novel tunable microwave photonic notch filter with a variable polarization beamsplitter and a Hi-Bi<br>coupler. Optical Engineering, 2005, 44, 100502.  | 1.0 | 4         |
| 496 | Tunable microwave filter that uses a high-birefringent fiber and a differential-group-delay element.<br>Journal of the Optical Society of America A: Optics and Image Science, and Vision, 2005, 22, 913. | 1.5 | 4         |
| 497 | Switchable and tunable microwave photonic filter using a variable polarization beamsplitter in a Sagnac interferometer. Journal of Optics, 2007, 9, 1136-1139.  | 1.5 | 4         |
| 498 | Position detection improvement of position sensitive detector (PSD) by using analog and digital signal processing. , 2007, , .  |     | 4         |
| 499 | Investigation on the interplay between dispersion and nonlinearity in subwavelengthâ€diameter silica<br>fibers. Microwave and Optical Technology Letters, 2008, 50, 2086-2090.                            | 1.4 | 4         |
| 500 | Multiple Dual-Wavelengths Erbium-Doped Fiber Ring Laser Using a Polarization-Maintaining<br>Fabry–PÉrot Filter. IEEE Photonics Technology Letters, 2008, 20, 1606-1608.                                   | 2.5 | 4         |
| 501 | Seamless generation and provisioning of broadcasting and independent services in WDMPON access networks. Optics Express, 2009, 17, 9630.  | 3.4 | 4         |
| 502 | Nanostructure Core Fiber With Enhanced Performances: Design, Fabrication and Devices. Journal of<br>Lightwave Technology, 2009, 27, 1548-1555.  | 4.6 | 4         |
| 503 | Four-Wave-Mixing-Based Phase-Sensitive Amplification of Pulsed Signal in Fibers. IEEE Photonics<br>Technology Letters, 2009, 21, 483-485.   | 2.5 | 4         |
| 504 | Energy efficient chalcogenide waveguide †Raman laser for optical interconnect. Optics Express, 2010,<br>18, 24434.  | 3.4 | 4         |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 505 | Mode Control in Planar Waveguide Grating Couplers With Double Surface Corrugation. IEEE<br>Photonics Technology Letters, 2012, 24, 1722-1725.                   | 2.5 | 4         |
| 506 | A compact all fiber refractive index sensor based on modal interference. , 2012, , .  |     | 4         |
| 507 | Raman-Assisted Wavelength Conversion in Chalcogenide Waveguides. IEEE Journal of Selected Topics<br>in Quantum Electronics, 2012, 18, 646-653.                  | 2.9 | 4         |
| 508 | Focused Ion Beam Nanoscale Patterned Transmission-Enhanced Fiber-Optic Tips. Journal of Nanoscience and Nanotechnology, 2013, 13, 4581-4586.                    | 0.9 | 4         |
| 509 | Relative humidity sensor based on optical fiber gratings and polyvinyl alcohol. , 2014, , .   |     | 4         |
| 510 | Relative phase noise induced impairment in CO-OFDM optical communication system with distributed fiber Raman amplifier. Optics Letters, 2014, 39, 2841.         | 3.3 | 4         |
| 511 | Characterization and mitigation of phase-modulation-dependent loss of liquid crystal on silicon.<br>Optics Letters, 2015, 40, 1484.                             | 3.3 | 4         |
| 512 | Internal Asymmetric Plasmonic Slot Waveguide for Third Harmonic Generation with Large Fabrication Tolerance. Plasmonics, 2016, 11, 1451-1459.                   | 3.4 | 4         |
| 513 | Experimental verification of relative phase noise in Raman amplified coherent optical communication system. Journal of Lightwave Technology, 2016, , 1-1.       | 4.6 | 4         |
| 514 | Pulsed Pumping for Pulsewidth Tunable Nanosecond Ytterbium-Doped Fiber Laser. IEEE Photonics<br>Technology Letters, 2016, 28, 2842-2845.                        | 2.5 | 4         |
| 515 | Hole-Assisted Graded-Index Four-LP-Mode Fiber With Low Differential Mode Group Delay Over C+L<br>Band. IEEE Photonics Journal, 2016, 8, 1-10.                   | 2.0 | 4         |
| 516 | CFBG-Based Bidirectional Mode-Locked Fiber Laser Emitting Conventional and Dissipative Solitons. IEEE<br>Photonics Technology Letters, 2019, 31, 1737-1740.     | 2.5 | 4         |
| 517 | Fano Resonance Based on Long Range Surface Phonon Resonance in the Mid-Infrared Region. IEEE<br>Photonics Journal, 2019, 11, 1-8.                               | 2.0 | 4         |
| 518 | Anomalous Sensitivity Enhancement of D-Shaped Fiber-Based Sandwiched Structure Optofluidic<br>Sensor. IEEE Access, 2020, 8, 105207-105216.                      | 4.2 | 4         |
| 519 | Vector soliton generation from a compact all-polarization-maintaining fiber laser. Laser Physics<br>Letters, 2021, 18, 025103.                                  | 1.4 | 4         |
| 520 | All-optical WDM Subcarrier Modulator for Binary Phase Shift Keying (BPSK) with Optical SSB Format<br>Using a Phase Modulator Loop Mirror Filter. , 2009, , .    |     | 4         |
| 521 | Joint Timing and Frequency Synchronization Based on FrFT Encoded Training Symbol for Coherent<br>Optical OFDM Systems. , 2016, , .                              |     | 4         |
| 522 | High-Q-factor phase-shifted helical fiber Bragg grating by one-step femtosecond laser inscription for high-temperature sensing. Optics Letters, 2022, 47, 1407. | 3.3 | 4         |

PING SHUM

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 523 | Self-Correcting Recurrent Neural Network for Acute Kidney Injury Prediction in Critical Care. Health Data Science, 2021, 2021, .  | 2.3 | 4         |
| 524 | Dynamic gain control for discrete Raman fiber amplifier. , 2001, , .  |     | 3         |
| 525 | New approach to determine the effects of polarization mode dispersion and chromatic dispersion on pulse and RF signals. Journal of the Optical Society of America A: Optics and Image Science, and Vision, 2006, 23, 117. | 1.5 | 3         |
| 526 | Nonlinearity enhanced fiber ring laser. , 2006, , .   |     | 3         |
| 527 | Measurement of the complex polarization mode dispersion vector using Jones matrix analysis. Applied Optics, 2007, 46, 916.  | 2.1 | 3         |
| 528 | Investigation of all-solid photonic bandgap fiber with low losses in low-order bandgaps. Optical and<br>Quantum Electronics, 2007, 39, 1071-1080.   | 3.3 | 3         |
| 529 | Hole-assisted lightguide fibers with small negative dispersion and low dispersion slope. Applied Optics, 2008, 47, 5061.  | 2.1 | 3         |
| 530 | Series Analysis of Active Mode-Locked Laser Under the Influence of ASE Noise. Journal of Lightwave<br>Technology, 2008, 26, 1671-1680.  | 4.6 | 3         |
| 531 | A microwave photonic filter using a switchable multiple dual-wavelength erbium-doped fiber laser.<br>Journal of Optics, 2008, 10, 085304.   | 1.5 | 3         |
| 532 | Tunable fiber Bragg grating filters realized by chirp rate tuning with a cantilever beam. Frontiers of Optoelectronics in China, 2010, 3, 71-77.  | 0.2 | 3         |
| 533 | Simultaneous Implementation of Photonic Logic or and and Gates for CSRZ-OOK Signals. IEEE<br>Photonics Technology Letters, 2010, 22, 960-962.   | 2.5 | 3         |
| 534 | Comb Spectrum Shaping Effect of a Fiber Sagnac Loop on an All-Normal-Dispersion Yb-Doped<br>Mode-Locked Fiber Laser. IEEE Photonics Technology Letters, 2011, 23, 57-59.  | 2.5 | 3         |
| 535 | Temperature response of polarization-maintaining photonic crystal fiber based interferometer. , 2011, , .   |     | 3         |
| 536 | Continuously tunable microwave photonic notch filter based on the differential group delay.<br>Microwave and Optical Technology Letters, 2011, 53, 121-123.   | 1.4 | 3         |
| 537 | Size effect of gold nanoparticles on optical microfiber refractive index sensors. , 2011, , .   |     | 3         |
| 538 | Sagnac interferometer based temperature sensor by using selectively filled photonic crystal fiber. , 2012, , .  |     | 3         |
| 539 | High Pulse Energy All-Fiber F-P Cavity Dissipative Soliton Laser. IEEE Photonics Technology Letters, 2013, 25, 303-305.   | 2.5 | 3         |
| 540 | Optical fiber humidity sensor based on Michelson interferometric structures. , 2013, , .  |     | 3         |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 541 | Miniature pH sensor based on optical fiber Fabry-Perot interferometer. , 2014, , .  |     | 3         |
| 542 | Programmable multi-wavelength filter with Mach–Zehnder interferometer embedded in ethanol filled photonic crystal fiber. Optics Letters, 2014, 39, 2194.  | 3.3 | 3         |
| 543 | Electrically Programmable All-Fiber Structured Second Order Optical Temporal Differentiator. IEEE<br>Photonics Journal, 2015, 7, 1-10.  | 2.0 | 3         |
| 544 | Single-longitudinal-mode multi-wavelength fiber laser with independent tuning of channel numbers and wavelength spacing. Applied Physics B: Lasers and Optics, 2015, 118, 23-28.                                | 2.2 | 3         |
| 545 | Low-complexity carrier phase estimation for M-ary QAM based on blind phase search using simplified measurement. , 2016, , .   |     | 3         |
| 546 | Pulse Shape Tuning for 1064 nm Nanosecond MOPA Fibre Laser. Procedia Engineering, 2016, 140, 123-126.   | 1.2 | 3         |
| 547 | General model of signal propagation in a Raman amplified single-mode fiber based coherent optical communication system. Optics Communications, 2016, 380, 401-408.  | 2.1 | 3         |
| 548 | Capillary Fiber Bragg Grating Fabricated by Femtosecond Laser for Sensing Applications. IEEE<br>Photonics Technology Letters, 2020, 32, 783-786.  | 2.5 | 3         |
| 549 | Microfiber Sagnac Interferometer for sensing applications. Photonics Letters of Poland, 2012, 4, .  | 0.4 | 3         |
| 550 | Formation of narrow pulses in a nonlinear lossy LC ladder network. IEEE Transactions on Circuits and Systems Part 1: Regular Papers, 1996, 43, 243-245.   | 0.1 | 2         |
| 551 | A long-period grating refractometer: measurements of refractive index sensitivity. , 0, , .   |     | 2         |
| 552 | Publisher's Note: Pulse-train nonuniformity in a fiber soliton ring laser mode-locked by using the<br>nonlinear polarization rotation technique [Phys. Rev. A69, 043808 (2004)]. Physical Review A, 2004, 69, . | 2.5 | 2         |
| 553 | Passively mode-locked fiber ring laser with tunable repetition rate output. Optical Engineering, 2005, 44, 060505.  | 1.0 | 2         |
| 554 | Investigation on optimized launch power in the distributed Brillouin fiber sensor design. Proceedings of SPIE, 2007, , .  | 0.8 | 2         |
| 555 | Dispersion effect and compensation in optical-carrier-suppressed modulation transport systems.<br>Journal of the Optical Society of America A: Optics and Image Science, and Vision, 2007, 24, 3432.            | 1.5 | 2         |
| 556 | Dual Orthogonal Polarization States in an Active Mode-Locked Birefringent Fiber Ring Laser. IEEE<br>Photonics Technology Letters, 2007, 19, 635-637.  | 2.5 | 2         |
| 557 | The design and fabrication of multitransmission-band optical FBG filter with ultranarrow wavelength spacing. Microwave and Optical Technology Letters, 2007, 49, 1122-1125.                                     | 1.4 | 2         |
| 558 | Discretely tunable single- and dual-wavelength fiber ring laser using a fiber Bragg gratings based<br>Fabry-Perot filter. Microwave and Optical Technology Letters, 2008, 50, 2170-2173.                        | 1.4 | 2         |

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 559 | Modeling and performance analysis of realizable optical queue with service differentiation capability.<br>Computer Communications, 2008, 31, 3654-3661.  | 5.1 | 2         |
| 560 | Three-dimensional FDTD method for optical pulse propagation analysis in microstructured optical fibers. Optics Communications, 2009, 282, 1123-1128.   | 2.1 | 2         |
| 561 | Coupled-mode analysis of Bragg-reflection filters based on asymmetric nonlinear dual-core fibers.<br>Journal of the Optical Society of America A: Optics and Image Science, and Vision, 2009, 26, 489. | 1.5 | 2         |
| 562 | Observation of spectral enhancement in a soliton fiber laser with fiber Bragg grating. Optics Express, 2009, 17, 3508.   | 3.4 | 2         |
| 563 | Optimum input states of polarization for Mueller matrix measurement in a system having finite polarization-dependent loss or gain. Optics Express, 2009, 17, 23044.                                    | 3.4 | 2         |
| 564 | A photonic approach for microwave/millimeter-wave frequency measurement using stimulated brillouin scattering in single mode fiber. Laser Physics, 2010, 20, 820-823.                                  | 1.2 | 2         |
| 565 | Photonic crystal fiber integrated microfluidic chip for highly sensitive real-time chemical sensing.<br>Proceedings of SPIE, 2011, , .   | 0.8 | 2         |
| 566 | High fluence KrF excimer laser fabricated Bragg grating in a microfiber. Physics Procedia, 2011, 19, 315-318.  | 1.2 | 2         |
| 567 | Investigation of InGaAsP Quantum-Well EAM Based Pump-Probe Configuration for Ultrafast Optical Signal Processing. IEEE Journal of Quantum Electronics, 2011, 47, 1113-1122.                            | 1.9 | 2         |
| 568 | Hybrid photonic crystal fiber selectively infiltrated with liquid crystal. , 2012, , .   |     | 2         |
| 569 | Longitudinal coupling effect in microfiber Bragg gratings. Optics Communications, 2012, 285, 4655-4659.  | 2.1 | 2         |
| 570 | Fiber bragg gratingâ€based load sensor without temperature dependence. Microwave and Optical<br>Technology Letters, 2012, 54, 930-933.   | 1.4 | 2         |
| 571 | Performance study and assessment of phase noise suppression by incoherent addition in a mode-locked fiber laser system. Optics Communications, 2012, 285, 153-157.                                     | 2.1 | 2         |
| 572 | 4 × 10 Gb s <sup>â^'1</sup> wavelength multicasting with tunable NRZ-to-RZ format conversion using nonlinear polarization rotation in an SOA. Laser Physics, 2013, 23, 085103.                         | 1.2 | 2         |
| 573 | Investigation on the Impact of Hi-Bi Fiber Length on the Sensitivity of Sagnac Interferometer. IEEE<br>Sensors Journal, 2014, 14, 1952-1956.   | 4.7 | 2         |
| 574 | High-performance reflective liquid level sensor based on titled fiber Bragg grating inscribed in the thin-core fiber. , 2014, , .  |     | 2         |
| 575 | All-VCSEL Transmitters With Remote Optical Injection for WDM-OFDM-PON. IEEE Photonics Technology<br>Letters, 2014, 26, 461-464.  | 2.5 | 2         |
| 576 | Quasi-distributed fiber sensor based on Fresnel-reflection-enhanced Incomplete-POTDR system.<br>Proceedings of SPIE, 2015, , .   | 0.8 | 2         |

| #   | Article  | IF     | CITATIONS |
|-----|--|--------|-----------|
| 577 | Design and fabrication of 100 kW peak power picosecond fiber laser for efficient laser marking and drilling. , 2015, , .   |        | 2         |
| 578 | Demonstration of Programmable In-Band OSNR Monitoring Using LCFBG With Commercial Thermal Printer Head. IEEE Photonics Journal, 2015, 7, 1-8.  | 2.0    | 2         |
| 579 | Spatial mode rotator based on mechanically induced twist and bending in few-mode fibers.<br>Proceedings of SPIE, 2015, , .   | 0.8    | 2         |
| 580 | Modes Effective Refractive Index Difference Measurement in Few-mode Optical Fiber. Procedia<br>Engineering, 2016, 140, 77-84.  | 1.2    | 2         |
| 581 | Investigation of Temperature Sensitivity Under the Influence of Coupling Strength Between a Silica<br>Core and a Satellite Waveguide in a Photonic Crystal Fiber with Selective Infiltration of Glycerin.<br>Procedia Engineering, 2016, 140, 72-76. | 1.2    | 2         |
| 582 | Refractive index sensor based on $\hat{l}_{j}$ -shaped microfiber resonator and Vernier effect. Proceedings of SPIE, 2017, , .   | 0.8    | 2         |
| 583 | Dynamics of nanosecond pulsed pump ytterbium-doped double-clad fiber amplifier. Optics Communications, 2017, 403, 325-329.   | 2.1    | 2         |
| 584 | Fiber Bragg grating sensors for real-time monitoring of boiler U-bend tubes thinning. , 2017, , .  |        | 2         |
| 585 | Design of Fabry-Perot Refractometer based on a simplified hollow-core PCF with a CFBG pair. , 2017, , .  |        | 2         |
| 586 | Broadband optical chaos generation by constructing a simple hybrid feedback loop. , 2017, , .  |        | 2         |
| 587 | Investigation of Germanium-Loaded Slot Waveguides for Mid-Infrared Third Harmonic Generation.<br>Plasmonics, 2018, 13, 2197-2204.  | 3.4    | 2         |
| 588 | A time and frequency synchronization method for CO-OFDM based on CMA equalizers. Optics Communications, 2018, 416, 166-171.  | 2.1    | 2         |
| 589 | Crossing-free on-chip 2  —  2 polarization-transparent switch with signals regrouping function.<br>Letters, 2018, 43, 4009.  | Optics | 2         |
| 590 | Ultra-Flattened Normal Dispersion Fiber for Supercontinuum and Dissipative Soliton Resonance<br>Generation at 2Âμm. IEEE Photonics Journal, 2019, 11, 1-11.  | 2.0    | 2         |
| 591 | Sensing Characteristics of a Grating-Based Fabry-Perot Structure in a Biconical Tapered Fiber. , 2019, , .   |        | 2         |
| 592 | Temperature Sensor Based on Selectively Liquid Infiltrated Dual Core Photonic Crystal Fiber. , 2019, , .   |        | 2         |
| 593 | Breathing Dynamics in a Gain-Guided Dissipative Soliton-Similariton Fiber Laser. IEEE Photonics<br>Technology Letters, 2020, 32, 481-484.  | 2.5    | 2         |
| 594 | Performance Enhancement of Opened Resonance Photoacoustic Cells Based on Three Dimensional<br>Topology Optimization. Photonics, 2021, 8, 380.  | 2.0    | 2         |

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 595 | Multi-band carrierless amplitude and phase modulation in RoF system for enhanced reliable mobile fronthaul. , 2018, , .  |     | 2         |
| 596 | Space-Division Multiplexed Multicore Fiber Mach-Zehnder Interferometer for Joint Temperature and Strain Sensing. , 2016, , .   |     | 2         |
| 597 | Compact Grating Coupler for Higher-order Mode Coupling. , 2018, , .  |     | 2         |
| 598 | Single-end Measurement of Polarization Mode Dispersion in Optical Fibers with<br>Polarization-dependent Loss. Progress in Electromagnetics Research Symposium: [proceedings]<br>Progress in Electromagnetics Research Symposium, 2007, 3, 842-846. | 0.4 | 2         |
| 599 | Phase Noise and Timing Jitter Eliminator for Mode-locked Lasers Based on External Graphene Layers. ,<br>2011, , .  |     | 2         |
| 600 | Long Period Grating in Multicore Fiber and Its Application for Measurement of Temperature and Strain. , 2015, , .  |     | 2         |
| 601 | 64 Core Ultra Dense Multicore Fiber Design for Optical Fronthaul Systems. , 2016, , .  |     | 2         |
| 602 | Simultaneous Measurement of Torsion and Temperature Based on Helical Structure in Multicore<br>Fiber. , 2016, , .  |     | 2         |
| 603 | A Simplified Adaptive Modulation Scheme for RSOA Based DDO-OFDM System using CAZAC Precoding. , 2016, , .  |     | 2         |
| 604 | 2×2 PolMux-MIMO RoF System Employing Interference Cancellation Based OFDM/OQAM Technique. , 2016, , .  |     | 2         |
| 605 | A Broadband and High Linearity Directly-Modulated Analog Photonic Link based on Push-Pull structure and Digital Signal Post-Compensation. , 2016, , .  |     | 2         |
| 606 | Highly Sensitive Temperature Sensor Based on Hybrid Photonic Crystal Fiber. , 2018, , .  |     | 2         |
| 607 | High apacity Ironâ€Based Anodes for Aqueous Secondary Nickel–Iron Batteries: Recent Progress and Prospects. ChemElectroChem, 2021, 8, 273-273.   | 3.4 | 2         |
| 608 | Carbon-steel tube surface mounted FBG sensors under high-temperature environment, part I:<br>Polyimide coated and femtosecond laser written. , 2020, , .   |     | 2         |
| 609 | Polarization-decoupled cavity solitons generation in Kerr resonators with flattened near-zero dispersion. Optics Express, 2022, 30, 20767.   | 3.4 | 2         |
| 610 | CGNetâ€assisted Automatic Vessel Segmentation for Optical Coherence Tomography Angiography.<br>Journal of Biophotonics, 0, , .   | 2.3 | 2         |
| 611 | <title>Analysis of nonlinear Bragg gratings by the matrix method</title> . , 1999, , .   |     | 1         |
| 612 | A Multi-Layered Optical Disc Scheme for High Density Storage Using Transparent Media. Japanese<br>Journal of Applied Physics, 2000, 39, L597-L600.   | 1.5 | 1         |

Рілс Ѕним

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 613 | Novel B/Ge codoped photosensitive fibres and their dispersion compensation applications. European<br>Physical Journal D, 2001, 51, 163-173.                                | 0.4 | 1         |
| 614 | Investigation of Raman fiber amplifier with all optical gain clamping. , 0, , .  |     | 1         |
| 615 | Investigation of Raman fiber amplifier with all-optical gain clamping ring. , 2002, 4906, 43.  |     | 1         |
| 616 | Tabu search algorithm to optimize the design of fiber Bragg gratings. , 2002, 4904, 206.   |     | 1         |
| 617 | Design and analysis of VCSEL based twodimension wavelength converter. Optics Express, 2003, 11, 1659.  | 3.4 | 1         |
| 618 | Measurements of glycerine concentration in water solution by using long-period grating refractometer. , 0, , .   |     | 1         |
| 619 | Theoretical Study of Extinction Ratio and Frequency Chirping of VCSEL-Based Two-Dimensional<br>Wavelength Converter. IEEE Photonics Technology Letters, 2004, 16, 533-535. | 2.5 | 1         |
| 620 | Distributed measurement of polarization mode dispersion in optical fibers by using P-OTDR. , 2005, , .   |     | 1         |
| 621 | Band gap characteristics of anisotropic photonic crystals. , 2005, 5644, 335.  |     | 1         |
| 622 | 40Gb/S Simultaneous Inverted and Non-inverted Wavelength Conversion Based on SOA Using Transient Cross Phase Modulation. , 2006, , .                                       |     | 1         |
| 623 | All-optical adders based on transient cross phase modulation using a single semiconductor optical amplifier. , 2006, , .   |     | 1         |
| 624 | Improved chromatic dispersion monitoring technique. Optics Communications, 2006, 259, 553-561.   | 2.1 | 1         |
| 625 | Flexible chirp control using the linearly inherent chirped phase mask with the equivalent chirp design. Optics Communications, 2006, 261, 56-59.                           | 2.1 | 1         |
| 626 | A compact inverted double-L antenna. Microwave and Optical Technology Letters, 2006, 48, 968-969.  | 1.4 | 1         |
| 627 | Tunable Mach-Zehnder interferometer in a two-dimensional photonic crystal with liquid crystal infiltration. , 2007, , .  |     | 1         |
| 628 | Full-vectorial analysis of photonic crystal fibers using a compact two-dimensional finite-difference time-domain method. , 2007, , .                                       |     | 1         |
| 629 | Chirped fiber Bragg grating sensor based on phase delay. Proceedings of SPIE, 2007, , .  | 0.8 | 1         |
| 630 | Chromatic dispersion induced PM-AM conversion and its application in the all-optical clock recovery of NRZ-DPSK signals. Proceedings of SPIE, 2007, , .                    | 0.8 | 1         |

Ping Shum

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 631 | Design and implementation of a UWB peer-to-peer communication network. , 2007, , .  |     | 1         |
| 632 | A realizable optical buffer structure enabling service differentiation in optical packet switched network node. , 2008, , .   |     | 1         |
| 633 | The use of polarization controllers in microwave photonic filters based on cascaded Hi-Bi fibers. ,<br>2008, , .  |     | 1         |
| 634 | A Broadcasting-enabled WDM-PON Architecture Based on Subcarrier Modulation Techniques. , 2008, , .  |     | 1         |
| 635 | Influence of CARS process in silicon Raman laser. , 2009, , .   |     | 1         |
| 636 | A Photonic Frequency Up-Converter Based on Nonlinear Polarization Rotation of an SOA for WDM Radio-Over-Fiber Systems. , 2009, , .  |     | 1         |
| 637 | Stable and high-performance multiwavelength erbium-doped fiber laser based on fiber delay interferometer. Frontiers of Optoelectronics in China, 2009, 2, 195-199.                                | 0.2 | 1         |
| 638 | Frequency Multiplication of Microwave Signals by Self-Induced Nonlinear Polarization Rotation in Semiconductor Optical Amplifiers (SOAs). IEEE Photonics Technology Letters, 2009, 21, 1081-1083. | 2.5 | 1         |
| 639 | Simultaneous UWB monocycle pulse generation and frequency up-conversion with multicasting capability using FWM effect in a highly nonlinear photonic crystal fiber (HNL-PCF). , 2010, , .         |     | 1         |
| 640 | Photonic instantaneous frequency measurement using optical carrier suppression based DC power monitoring. , 2011, , .   |     | 1         |
| 641 | Bidirectional operation of a mode-locked fiber laser based on a four-port circulator and two SESAMs. , 2011, , .  |     | 1         |
| 642 | Tunable microwave generation based on a phase-shifted chirped fiber Bragg grating. , 2011, , .  |     | 1         |
| 643 | Stable CW operation in a ring fiber laser based on Er-doped photonic crystal fiber. , 2011, , .   |     | 1         |
| 644 | Refractometer based on tilted fiber Bragg grating incorporating with waist-enlarged fusion bitaper. , 2012, , .   |     | 1         |
| 645 | Theoretical investigation on low-loss IR-transmitting hollow-core metallic fiber with double-cladding. , 2012, , .  |     | 1         |
| 646 | Tolerant wideband high-efficiency grating coupler for TM mode excitation. , 2012, , .   |     | 1         |
| 647 | Compact passively mode-locked fiber laser at 1.55 $\hat{l}$ /4 m with low timing jitter of 8 fs. Proceedings of SPIE, 2013, , .   | 0.8 | 1         |
| 648 | Pulse beat monitoring using dual-polarization DBR fiber laser. , 2013, , .  |     | 1         |

Pulse beat monitoring using dual-polarization DBR fiber laser. , 2013, , . 648

1

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 649 | Magneto-optical fiber sensor based on magnetic fluid surrounded tilted fiber Bragg grating. , 2013, , .   |     | 1         |
| 650 | Fiber non-Turing all-optical computer for solving complex decision problems. , 2013, , .  |     | 1         |
| 651 | Highly Efficient Phase-Matched Third Harmonic Generation From Mid-IR to Near-IR Regions Using an<br>Asymmetric Plasmonic Slot Waveguide. IEEE Photonics Journal, 2014, 6, 1-9.            | 2.0 | 1         |
| 652 | A Simple Algorithm for C <sub>2</sub> H <sub>2</sub> Real-Time Monitor in DOAS Technology. IEEE<br>Photonics Technology Letters, 2014, 26, 2341-2344.                                     | 2.5 | 1         |
| 653 | Computing with complex optical networks. , 2014, , .  |     | 1         |
| 654 | Highly sensitive refractive index sensor based on two cascaded microfiber knots with Vernier effect.<br>Proceedings of SPIE, 2014, , .  | 0.8 | 1         |
| 655 | Spectrum superposition based chromatic dispersion estimation for digital coherent receivers. , 2014, , .  |     | 1         |
| 656 | SNR Equalized Optical Direct-Detected OFDM Transmission with CAZAC Equalization. , 2015, , .  |     | 1         |
| 657 | Abnormal Noise-Like Pulse Fiber Laser for Disruptive Sensing Applications. , 2017, , .  |     | 1         |
| 658 | Training symbol assisted in-band OSNR monitoring technique suitable for long haul Raman amplified PDM-CO-OFDM system. , 2017, , .   |     | 1         |
| 659 | Temperature-Independent Bending Sensor Based on Hollow Core Microstructured Optical Fiber. , 2019, , .  |     | 1         |
| 660 | Anti-resonant reflecting effect in large-core hollow-core photonic crystal fiber for temperature sensing. , 2019, , .   |     | 1         |
| 661 | Design of germanium-silicon carbide hybrid waveguides for mid-infrared third-order parametric conversion. Optics Communications, 2020, 456, 124668.                                       | 2.1 | 1         |
| 662 | Numerical investigation of efficient mid-infrared supercontinuum generation and cavity soliton generation based on flattened near-zero dispersion fiber. Laser Physics, 2020, 30, 085105. | 1.2 | 1         |
| 663 | Helical long-period grating on multicore fiber for refractive index sensing. , 2020, , .  |     | 1         |
| 664 | Tunable WDM filters based on cascaded long-period fiber gratings. , 2005, , .   |     | 1         |
| 665 | Optimizing Birefringence of Polarization-Maintaining Photonic Crystal Fiber. , 2014, , .  |     | 1         |
|     |   |     | _         |

666 High-Birefringent Microstructured Optical Fiber Based Surface Plasmon Resonance Sensor., 2016,,.

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 667 | Using Nonlinear Optical Networks for Optimization: Primer of the Ant Colony Algorithm. , 2014, , .  |     | 1         |
| 668 | Temperature-Insensitive Glucose sensor with Fiber Ring Laser inserted by 45° Tilted Fiber Bragg<br>Grating. , 2021, , .   |     | 1         |
| 669 | A compressive sensing single pixel imaging system using in-fiber grating. , 2021, , .   |     | 1         |
| 670 | Design and fabrication of a holey fiber microfluidic device with transverse micro-channel. Photonics<br>Letters of Poland, 2014, 6, .                                   | 0.4 | 1         |
| 671 | Highly Sensitive Strain Sensor Based on Helical Structure in Multicore Fiber. , 2016, , .   |     | 1         |
| 672 | Reproducible Broadband Optical Noise Generation Based on Phase Modulation to Intensity<br>Modulation Conversion and a Nonlinear Transformation. , 2017, , .             |     | 1         |
| 673 | Temperature Sensor by Using Highly Germanium-doped Fiber. , 2018, , .   |     | 1         |
| 674 | Mid-IR supercontinuum generation in a single-mode ZBLAN fiber pumped by a carbon-nanotube-based passively mode-locked erbium-doped femtosecond fiber laser. , 2018, , . |     | 1         |
| 675 | Temperature sensor based on highly germanium-doped fiber with rounded tip. , 2018, , .  |     | 1         |
| 676 | Maximizing the security of digital chaos based OFDM-PON with a dynamical nonlinear transformation. , 2019, , .  |     | 1         |
| 677 | Two-core photonic crystal fiber with selective liquid infiltration in the central air hole for temperature sensing. OSA Continuum, 2020, 3, 2264.                       | 1.8 | 1         |
| 678 | Experimental Investigation of Bending Sensor Based on Helical Structure in Hollow Core Fiber. , 2020,   |     | 1         |
| 679 | Manipulation of Kerr cavity solitons based on projected super-position technique. Optics<br>Communications, 2022, 520, 128462.  | 2.1 | 1         |
| 680 | Numerical simulation as a modeling and teaching tool of optical devices and systems. , 1997, 3190, 271.   |     | 0         |
| 681 | Numerical simulation models of soliton systems. , 1998, , .   |     | Ο         |
| 682 | Self-sustained pulsation in vertical-cavity surface-emitting lasers under external optical feedback. , 2000, 3944, 894.   |     | 0         |
| 683 | <title>Fabrication of UV-sensitive waveguides for integrated photonics applications</title> . , 2000, 4110, 316.  |     | 0         |
| 684 | <title>Application of mechanical fiber mode converter and asymmetric fiber as optical isolator</title> . , 2000, , .  |     | 0         |

Рімд Ѕним

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 685 | <title>Fabrication of long-period waveguide gratings</title> . , 2000, , .  |     | Ο         |
| 686 | <title>Analysis of nonlinear soliton propagation by the improved FMAT</title> . , 2000, , .                                 |     | 0         |
| 687 | <title>Nonlinear instabilities of Bragg grating device</title> ., 2000, , .   |     | Ο         |
| 688 | Split-step reconstruction technique for the analysis of soliton propagation. , 2000, 3944, 953.                             |     | 0         |
| 689 | Nonlinear soliton propagation by use of the split-step reconstruction technique. Applied Optics, 2000, 39, 3632.            | 2.1 | 0         |
| 690 | <title>Metaheuristic approach to design erbium-doped fiber amplifier module for DWDM&lt;br&gt;network</title> . , 2001, , . |     | 0         |
| 691 | Solitonlike pulses in an actively mode-locked fiber laser. , 2001, , .  |     | 0         |
| 692 | Performance analysis of an actively mode-locked fiber laser. , 2002, , .  |     | 0         |
| 693 | 158-fs ultrashort soliton pulse from NPR fiber laser. , 2002, , .   |     | 0         |
| 694 | Photonic crystal fibers and their applications in optical communications and sensors. , 2002, 4904, 37.                     |     | 0         |
| 695 | Operation stability of an actively mode-locked fiber ring laser. , 2002, , .  |     | Ο         |
| 696 | Suppression of self-frequency shift in a harmonically mode-locked ring laser. , 2002, 4904, 363.                            |     | 0         |
| 697 | Development of electrically tunable optical filters based on fiber Bragg gratings. , 2002, , .                              |     | 0         |
| 698 | Design of dispersion slope compensator using tapered fiber Bragg gratings. , 2002, 4906, 274.                               |     | 0         |
| 699 | <title>Nonlinear pulse switching of fiber coupler with two nonidentical cores</title> ., 2002, , .                          |     | 0         |
| 700 | Investigations of photonic crystal fiber splicing. , 0, , .   |     | 0         |
| 701 | Loss property of photonic bandgap fiber made of high-index cylinders in low-index host material. ,<br>2004, , .             |     | Ο         |
| 702 | Design and analysis of VCSEL-based two-dimension wavelength converter by using developed TLLM. ,<br>2004, , .               |     | 0         |

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 703 | Observation of noise-like solitons. , 2004, 5280, 57.  |     | Ο         |
| 704 | <title>Highly compact temperature-insensitive phase-shifted and multiple-phase-shifted long-period&lt;br&gt;fiber gratings by use of a CO&lt;formula&gt;&lt;inf&gt;&lt;roman&gt;2&lt;/roman&gt;&lt;/inf&gt;&lt;/formula&gt; laser</title> . , 2004,<br>, . |     | 0         |
| 705 | Fabrication of wide-bandpass filters based on phase-shifted long-period fiber gratings inscribed by focused pulses of CO/sub 2/ laser. , 2004, , .   |     | 0         |
| 706 | Novel fiber Bragg grating sensor for temperature-insensitive displacement measurement. , 2004, , .   |     | 0         |
| 707 | Anti-resonant reflecting photonic crystal vertical-cavity surface-emitting lasers. , 2005, , .   |     | 0         |
| 708 | A novel structure of optical buffer. , 2005, , .   |     | 0         |
| 709 | Soliton interaction in a fiber ring laser. , 2005, 5623, 652.  |     | 0         |
| 710 | Analysis of supercontinuum generation in highly nonlinear fibers pumped by erbium fiber laser sources: observations and optimizations. , 2005, , .   |     | 0         |
| 711 | Investigation polarization characteristics of vertical-cavity surface-emitting lasers. , 2005, , .   |     | 0         |
| 712 | Anomalous properties of cascaded photonic crystal fiber based long period gratings. , 2005, 6019, 227.   |     | 0         |
| 713 | Phase-plane analysis of rational harmonic mode-locking in an erbium-doped fiber ring laser. IEEE<br>Journal of Quantum Electronics, 2005, 41, 426-433.   | 1.9 | 0         |
| 714 | Generation of picosecond soliton pulses with tunable repetition rate by modulational instability. , 2006, 6028, 436.   |     | 0         |
| 715 | Scalar transfer matrix method analysis of ARROW VCSEL. , 2006, , .   |     | 0         |
| 716 | Polarization mode dispersion vectors measurement in optical fibers. Proceedings of SPIE, 2006, , .   | 0.8 | 0         |
| 717 | Polarization dependent transmission measurement methods in an optical fiber link. Proceedings of SPIE, 2006, , .   | 0.8 | 0         |
| 718 | Multi-wavelength SOA-fiber laser with versatile multichannel filters based on fiber Bragg gratings.<br>Proceedings of SPIE, 2006, , .  | 0.8 | 0         |
| 719 | Flexible bandwidth control of the single-mode guided band in a 2D photonic crystal coupled-cavity waveguide. , 2006, , .   |     | 0         |
| 720 | Photonic fiber ring lasers: experimental demonstration and analytical studies of harmonic detuning, temporal diffraction, ultra-high stability. Proceedings of SPIE, 2006, , .   | 0.8 | 0         |

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 721 | Cross-layer approach for performance evaluation in IP/GMPLS over WDM network. , 2006, , .  |     | Ο         |
| 722 | Multi-wavelength mode-locked fiber laser. Proceedings of SPIE, 2006, , .   | 0.8 | 0         |
| 723 | Experimental investigation of tunable all-solid photonic bandgap fiber coupler. , 2007, , .  |     | Ο         |
| 724 | Impairment-aware network performance of 40Gbps, 16-î» IP/GMPLS over WDM system. , 2007, , .  |     | 0         |
| 725 | All-optical microwave photonic filters with Hi-Bi linearly chirped grating. Proceedings of SPIE, 2007, , .   | 0.8 | Ο         |
| 726 | Simultaneous dual free spectral range microwave photonic filter using a high-birefringence chirped<br>grating in a Sagnac loop. Journal of the Optical Society of America A: Optics and Image Science, and<br>Vision, 2007, 24, 188. | 1.5 | 0         |
| 727 | Tunable negative tap microwave photonic filter using an SOA in a Sagnac loop. Microwave and Optical<br>Technology Letters, 2008, 50, 225-226.  | 1.4 | Ο         |
| 728 | Bandgap splitting in liquid crystal photonic bandgap fibers. , 2008, , .   |     | 0         |
| 729 | Theoretical investigations of birefringence in hybrid photonic crystal fibers. , 2008, , .   |     | Ο         |
| 730 | Multi-tap microwave photonic filter using a sampled-chirped fiber Bragg grating based multi-wavelength erbium-doped fiber laser. , 2008, , .   |     | 0         |
| 731 | Air-core bandgap terahertz fiber with wider bandwidth. , 2008, , .   |     | Ο         |
| 732 | Analytical method for band structure calculation of liquid crystal filled photonic crystal fibers. ,<br>2008, , .  |     | 0         |
| 733 | Phase-Sensitive Amplifier Based on Cascaded Four-Wave Mixing. , 2008, , .  |     | Ο         |
| 734 | Polarization maintaining air-core fiber for terahertz guiding. , 2008, , .   |     | 0         |
| 735 | Fiber Loop Mirrors Composed of Two Dispersion Shifted Fibers and a Single Mode Fiber. , 2008, , .  |     | Ο         |
| 736 | Design of UV-Photosensitive Highly Dispersive Photonic Crystal Fiber for Microwave Photonics Delay<br>Processing. , 2008, , .  |     | 0         |
| 737 | Hybrid photonic crystal fiber coupler infiltrated with liquid crystals. , 2009, , .  |     | 0         |
| 738 | Optical fiber-based devices and applications. Frontiers of Optoelectronics in China, 2010, 3, 1-1.   | 0.2 | 0         |

Рімд Ѕним

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 739 | Fabrication tolerance study on mode-coupling-based polarization rotators. , 2010, , .  |     | Ο         |
| 740 | Ultra-high efficiency wavelength conversion by coherent anti-stokes Raman scattering (CARS) in chalcogenide waveguides. , 2010, , .                          |     | 0         |
| 741 | Influence of electronic nonlinear process in silicon Raman wavelength converter. , 2010, , .   |     | Ο         |
| 742 | High conversion efficiency and low lasing threshold waveguide Raman laser for optical interconnect. , 2010, , .  |     | 0         |
| 743 | Investigation of wavelength conversion by coherent anti-Stokes Raman scattering (CARS) in chalcogenide waveguides. , 2010, , .                               |     | 0         |
| 744 | A hollow-core Bragg fiber with 450 nm broadening of low-loss guidance in near infrared spectral range. , 2010, , .   |     | 0         |
| 745 | Carbon-nanotube-based passively mode-locked fiber laser for supercontinuum generation. , 2010, , .   |     | 0         |
| 746 | Excitation of hybrid plasmon polaritons (HPPs) using nanofibers. , 2010, , .   |     | 0         |
| 747 | Hybrid pendulum-based 2-D tilt sensor with two fiber Bragg gratings. , 2010, , .   |     | Ο         |
| 748 | Effect of photodetector on the noise conversion of the optical pulse train generated from mode-locked lasers. , 2010, , .                                    |     | 0         |
| 749 | Low timing jitter fiber laser passively mode-locked by Single-Wall Carbon Nanotubes. , 2010, , .   |     | Ο         |
| 750 | Photonic generation of microwave signals with tunable frequency. , 2011, , .   |     | 0         |
| 751 | Passive Q-switching in 25-km ultra long cavity all-fiber ring laser. , 2011, , .   |     | Ο         |
| 752 | Miniaturized photonic crystal fiber tip sensor for refractive index sensing. , 2011, , .   |     | 0         |
| 753 | Microwave photonics research for defense applications in Singapore. , 2011, , .  |     | Ο         |
| 754 | Investigation and suppression of the pump-to-Stokes relative intensity noise transfer in chalcogenide waveguide Raman laser. Optics Letters, 2011, 36, 2366. | 3.3 | 0         |
| 755 | Investigation polarization characteristics of vertical-cavity surface-emitting lasers. Optik, 2011, 122, 1595-1597.  | 2.9 | Ο         |
| 756 | Analysis and evaluation of phase noise suppression by incoherent addition for a passive mode-locked fiber laser. , 2011, , .                                 |     | 0         |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 757 | Phase noise at harmonic frequencies of a mode-locked fiber laser and low-timing-jitter microwave extraction. , 2011, , .  |     | 0         |
| 758 | Characterization of the RIN-to-phase-noise conversion induced by photodetectors in the microwave synthesis from mode-locked lasers. , 2011, , .                                   |     | 0         |
| 759 | Frequency tunable microwave generation based on a dual-wavelength single-longitudinal-mode fiber laser incorporating a phase-shifted grating. , 2011, , .                         |     | Ο         |
| 760 | Optical millimeter-wave generation utilizing optical parametric loop mirror and fiber Bragg grating.<br>Proceedings of SPIE, 2011, , .  | 0.8 | 0         |
| 761 | Analysis of spectral-phase conventional and long-range surface plasmon resonance biosensors.<br>Proceedings of SPIE, 2012, , .  | 0.8 | 0         |
| 762 | Temperature-independent strain sensor based on simplified hollow-core photonic crystal fibers. ,<br>2012, , .   |     | 0         |
| 763 | Optical twisting alert sensor based on PM-EDF short cavity DBR laser. , 2012, , .   |     | 0         |
| 764 | Investigation of strain-induced effects on microwave signals from an PM-EDF based short cavity DBR<br>laser. , 2012, , .  |     | 0         |
| 765 | A directional coupler based on nematic liquid crystal filled photonic crystal fiber. , 2012, , .  |     | 0         |
| 766 | Whispering gallery mode excitation and collection using fused-tapered fiber tips. , 2012, , .   |     | 0         |
| 767 | Photonic generation of microwave pulses with wide frequency multiplication tuning range. , 2012, , .  |     | 0         |
| 768 | Generation of tunable continuous-wave microwave signals using photonic techniques. , 2012, , .  |     | 0         |
| 769 | Microbubble-enabled photonic crystal fiber-based sensors. , 2012, , .   |     | 0         |
| 770 | Characteristics of suspended-core fiber interferometer: Modal analysis. , 2012, , .   |     | 0         |
| 771 | Highly compact ultra-low loss polarization insensitive 1-to-2 multimode interference splitter. , 2012, , .  |     | Ο         |
| 772 | Dual-polarization DBR fiber laser sensor for liquid-level measurement. Proceedings of SPIE, 2012, , .   | 0.8 | 0         |
| 773 | A Mach-Zehnder interferometer by combining a microtaper with a long period grating in an all solid photonic bandgap fiber and its temperature sensing characteristic. , 2012, , . |     | Ο         |
| 774 | Vertical coupling for silicon nitride waveguides using silicon grating couplers and transitions. , 2012,  |     | 0         |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 775 | Rayleigh backscattering noise in single-fiber loopback duplex WDM-PON architecture. Frontiers of Optoelectronics, 2012, 5, 435-438.   | 3.7 | 0         |
| 776 | Measuring photodarkening from Ytterbium-doped fiber amplifier at 1064 nm wavelength emission. , 2012, , .   |     | 0         |
| 777 | Minimize quantum-defect heating in thulium-doped silica fiber amplifiers by tandem-pumping. , 2012, , .   |     | 0         |
| 778 | Femtosecond laser assisted selective infiltration of dual-core photonic crystal fiber. , 2013, , .  |     | 0         |
| 779 | Generation of Time- and Wavelength-Interleaved Optical Pulse-Train With Tunable Pulsewidth Based on Dispersion and Sectional Compression. Journal of Lightwave Technology, 2013, 31, 1106-1113. | 4.6 | 0         |
| 780 | Comparison of timing noise properties of carbon nanotubes, graphene and graphene oxide as saturable absorbers for a mode-locked Er-doped fiber laser. , 2013, , .                               |     | 0         |
| 781 | Guest Editorial Special Issue on Selected Papers From the IEEE Sensors 2011 Conference. IEEE Sensors<br>Journal, 2013, 13, 889-889.   | 4.7 | 0         |
| 782 | Power-referenced refractometer based on hybrid fiber grating. Proceedings of SPIE, 2013, , .  | 0.8 | 0         |
| 783 | Novel fiber for low-loss mid-infrared transmission. , 2014, , .   |     | 0         |
| 784 | Magnetic field sensor based on reflection spectrum measurement of fiber Bragg grating. Proceedings of SPIE, 2014, , .   | 0.8 | 0         |
| 785 | Efficient phase-matched third harmonic generation from mid-IR to near-IR regions in a double asymmetric plasmonic slot waveguide. , 2014, , .   |     | 0         |
| 786 | New low-complexity but effective mitigation for penalties from in-band crosstalk of multicore fiber with advanced modulation formats. , 2014, , .   |     | 0         |
| 787 | Genetic algorithm based optimization of pulse profile for MOPA based high power fiber lasers. , 2015, , $\cdot$   |     | 0         |
| 788 | Noise Properties in SESAM-Based Mode-Locked Laser With Intracavity Pump Reflection Coating. IEEE<br>Photonics Technology Letters, 2015, 27, 1200-1203.  | 2.5 | 0         |
| 789 | One-micron resolution optical coherence tomography (OCT) in vivo for cellular level imaging.<br>Proceedings of SPIE, 2015, , .  | 0.8 | 0         |
| 790 | Multiwavelength thulium-doped fiber laser based on four-wave mixing in highly germania-doped fiber.<br>, 2015, , .  |     | 0         |
| 791 | Curvature Sensor Based on Long-Period Grating in Dual Concentric Core Fiber. , 2015, , .  |     | 0         |
| 792 | Design and Fabrication of Side-channel Photonic Crystal Fiber for Surface Enhanced Raman Scattering<br>Applications. , 2015, , .  |     | 0         |

| #   | Article   | IF  | CITATIONS |
|-----|---|-----|-----------|
| 793 | Compact continuous wave optical parametric amplifier for tunable 1.44–1.50 µm laser radiation. , 2016, , .  |     | 0         |
| 794 | Precoding assisted direct detection optical FBMC for 100 Gbit/s short-range transmission system. , 2016, , .  |     | 0         |
| 795 | Pixelated-core Large Pitch Optical Fibre Design. Procedia Engineering, 2016, 140, 115-122.  | 1.2 | 0         |
| 796 | The Numerical Modeling of 3D Microfiber Couplers and Resonators. IEEE Photonics Technology Letters, 2016, 28, 1707-1710.                            | 2.5 | 0         |
| 797 | Curvature-induced Brillouin frequency shifts of fundamental mode in few mode fiber. , 2016, , .   |     | 0         |
| 798 | All-fiber femtosecond laser pulse generation at 1.55 μm and 2 μm using a common carbon-nanotube based saturable absorber. , 2017, , .               |     | 0         |
| 799 | 160 W nanosecond ytterbium-doped pulsed fiber laser. , 2017, , .  |     | Ο         |
| 800 | Widely tunable optoelectronic oscillator using phase modulation to intensity modulation conversion and a heterogeneous multicore fiber. , 2017, , . |     | 0         |
| 801 | Broadband Inter-Core Optical Multicasting within Multicore Fibre. , 2017, , .   |     | 0         |
| 802 | Optimisation of long period fibre grating design. , 2017, , .   |     | 0         |
| 803 | Helical long period grating in multicore fiber for simultaneous measurement of torsion and temperature. , 2017, , .                                 |     | 0         |
| 804 | Measurement of the fibre transfer delay difference between two fibre sections using balanced detection. , 2017, , .                                 |     | 0         |
| 805 | Third harmonic generation in tapered photonic crystal fiber. , 2017, , .  |     | 0         |
| 806 | Mid-infrared supercontinuum generation by nanosecond diode pumping. , 2017, , .   |     | 0         |
| 807 | Directional bending sensor based on spatially arrayed long period gratings in multicore fiber. , 2017, , .  |     | 0         |
| 808 | Design and optimization of long period fiber grating devices for sensing applications by using python. , 2017, , .                                  |     | 0         |
| 809 | Experimental demonstration of MCF enabled bidirectional colorless CAP-PON system with wavelength reuse technique. , 2017, , .                       |     | 0         |
| 810 | Long haul quasi-single-mode transmission using Raman amplified hybrid FMF/SSMF span for CO-OFDM system. , 2017, , .                                 |     | 0         |

Рілс Ѕним

| #   | Article  | IF  | CITATIONS |
|-----|--|-----|-----------|
| 811 | Ruggedised low frequency range vibration sensor using fiber Bragg gratings. , 2017, , .  |     | ο         |
| 812 | Broadband supercontinuum generation in highly nonlinear fiber with carbon-nanotube-based passively mode-locked erbium-doped fiber laser. , 2017, , .                   |     | 0         |
| 813 | Arbitrary picosecond pulse shaping in a radially polarized Yb-fiber MOPA beyond 10 W. , 2017, , .  |     | Ο         |
| 814 | Broadband supercontinuum generation in photonics crystal fiber pumped by femtosecond carbon-nanotube-based passively mode-locked erbium-doped fiber laser. , 2017, , . |     | 0         |
| 815 | Ytterbium-Doped Fiber Amplifiers Seeded With Superluminescent Light Emitting Diode. IEEE Photonics<br>Technology Letters, 2017, 29, 2067-2070.                         | 2.5 | 0         |
| 816 | Fundamental-mode Phase-matched Third Harmonic and Triplet Photon Generation based on Heterogeneous Mode Interaction. , 2018, , .                                       |     | 0         |
| 817 | Crossing-Free On-Chip <tex>\$2imes 2\$</tex> Polarization-Diverse Switch. , 2018, , .  |     | Ο         |
| 818 | Dual-wavelength Mode-locked Fiber Laser Emitting Soliton Singlets and Molecules. , 2019, , .   |     | 0         |
| 819 | In-fiber Surface Plasmon Resonance Temperature Sensor Based on PDMS Infiltrated Hollow Core Fiber.<br>, 2019, , .  |     | Ο         |
| 820 | Resonance Energy Leakage in Hollow Core Fiber for Sensitive Liquid Level Measurement. , 2019, , .  |     | 0         |
| 821 | Deterministic Single Soliton Generation Driven by Chirped Optical Pulses in Kerr Microresonator. ,<br>2019, , .  |     | 0         |
| 822 | Dispersion-Managed Soliton Molecules in An All-Fiber Mode-Locked Fiber Laser With Near Zero<br>Dispersion. , 2019, , .   |     | 0         |
| 823 | Bidirectional Mode-Locked Fiber Laser Emitting Scalar and Vector Noise-Like Pulses. , 2019, , .  |     | Ο         |
| 824 | Mid-infrared high repetition mode-locked laser based on cross-band all-optical injection modulation.<br>Laser Physics Letters, 2020, 17, 065101.                       | 1.4 | 0         |
| 825 | Modeling analysis of vortex beams propagation through a merged atmospheric turbulence and aerosol medium. , 2021, , .  |     | Ο         |
| 826 | Silica-based Low Loss All-solid Bandgap Fiber. , 2007, , .   |     | 0         |
| 827 | Characterization of the RIN-to-Phase-Noise Conversion in the Microwave Synthesis from Mode-locked Lasers. , 2011, , .  |     | 0         |
| 828 | A stable dual-wavelength single-longitudinal-mode fiber laser with a tunable wavelength spacing based on a chirped phase-shifted grating filter. , 2011, , .           |     | 0         |

| #   | Article  | IF | CITATIONS |
|-----|--|----|-----------|
| 829 | Characterization of the RIN-to-Phase-Noise Conversion in the Mode-Locked Fiber Lasers. , 2012, , .   |    | Ο         |
| 830 | A Strain Insensitive Temperature Sensor Based on In-fiber Integrated Multipath Interferometer. , 2013, , .   |    | 0         |
| 831 | Low-timing-jitter Mode-locked Fiber Laser Based on Graphene Oxide PVA Thin Film as Saturable<br>Absorber. , 2014, , .  |    | Ο         |
| 832 | Efficient analysis of high power nonlinear soliton propagation. , 1998, , .  |    | 0         |
| 833 | Mid-infrared Raman sources with highly GeO2-doped silica optical fibers. , 2015, , .   |    | Ο         |
| 834 | Grating Effect in Lanthanum Aluminum Silicate Glass Fiber. , 2015, , .   |    | 0         |
| 835 | Figure of Merit (FOM) for Multicore Fiber-based Long-haul Transmission Assessment. , 2015, , .   |    | О         |
| 836 | Compact temperature sensor by using a specialty fiber of Germania core and silica cladding. , 2015, , .  |    | 0         |
| 837 | Low-Cost In-Band OSNR Monitoring based on Coherent Hybrid in CO-OFDM System. , 2015, , .   |    | Ο         |
| 838 | Experimental Demonstration of Symmetric WDM-SDM Optical Access Network over Multicore Fiber. , 2016, , .   |    | 0         |
| 839 | Efficient edge coupler for higher order mode fiber-to-chip coupling. , 2016, , .   |    | Ο         |
| 840 | In-line Optofluidic Sensor Based on a Long-Period Grating in a Side-Channel Photonic Crystal Fiber. ,<br>2016, , .   |    | 0         |
| 841 | Integrated chiral long period gratings in multicore fiber. , 2017, , .   |    | Ο         |
| 842 | Helically Twisted Seven-Core Fiber Based Optical Sensors. , 2018, , .  |    | 0         |
| 843 | Flat broadband supercontinuum generation in a short length of highly nonlinear fiber pumped by a femtosecond carbon-nanotube based passively mode-locked erbium-doped fiber laser. , 2018, , . |    | О         |
| 844 | Suspended-core fiber based Sagnac interferometer device and sensing applications. , 2019, , .  |    | 0         |
| 845 | Robust digital-controllable broadband analog optical chaos generation. , 2019, , .   |    | 0         |
| 846 | Multi-state solitons in a CFBG-based ultrafast bidirectional fiber laser. , 2019, , .  |    | 0         |

| #   | Article   | IF | CITATIONS |
|-----|---|----|-----------|
| 847 | Pulsating internal oscillation of soliton molecules in passively mode-locked fiber lasers. , 2020, , .  |    | 0         |
| 848 | Transition dynamics of soliton molecules in passively mode- locked fiber lasers. , 2020, , .  |    | 0         |
| 849 | Highly sensitive bending sensor based on a tapered hollow core microstructured optical fiber. , 2020, , .   |    | Ο         |
| 850 | Carbon-steel tube surface mounted FBG sensors under high-temperature environment, part II: Gold coated and femtosecond laser written. , 2020, , . |    | 0         |
| 851 | Spatial Multiplexing Cavity Solitons in a Monochromatically Driven Kerr Resonator. , 2021, , .  |    | 0         |